

## PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

<b>Date of mailing</b> (day/month/year) 31 May 2001 (31.05.01)	
<b>International application No.</b> PCT/CA00/01108	<b>Applicant's or agent's file reference</b> 8831-137 SJP
<b>International filing date</b> (day/month/year) 25 September 2000 (25.09.00)	<b>Priority date</b> (day/month/year) 23 September 1999 (23.09.99)
<b>Applicant</b> GILHULY, Barry, J. et al	

1. The designated Office is hereby notified of its election made:

in the demand filed with the International Preliminary Examining Authority on:  
 \_\_\_\_\_  
 11 April 2001 (11.04.01)

in a notice effecting later election filed with the International Bureau on:  
 \_\_\_\_\_

2. The election  was  
 was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland	<b>Authorized officer</b> Charlotte ENGER
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

PCT

REC'D 31 JAN 2002	
WIPO	PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 85 RE 67 35.	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/CA00/01108	International filing date (day/month/year) 25/09/2000	Priority date (day/month/year) 23/09/1999
International Patent Classification (IPC) or national classification and IPC H04L12/58		
Applicant RESEARCH IN MOTION LIMITED et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 18 sheets, including this cover sheet.

This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I  Basis of the report
- II  Priority
- III  Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV  Lack of unity of invention
- V  Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI  Certain documents cited
- VII  Certain defects in the international application
- VIII  Certain observations on the international application

Date of submission of the demand 11/04/2001	Date of completion of this report 29.01.2002
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Keller, M Telephone No. +49 89 2399 8807 

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/CA00/01108

**I. Basis of the report**

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-55 as originally filed

**Claims, No.:**

1-62 as originally filed

**Drawings, sheets:**

1/12-12/12 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- the language of publication of the international application (under Rule 48.3(b)).
- the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- contained in the international application in written form.
- filed together with the international application in computer readable form.
- furnished subsequently to this Authority in written form.
- furnished subsequently to this Authority in computer readable form.
- The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- the description, pages:
- the claims, Nos.:

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/CA00/01108

the drawings, sheets:

5.  This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:  
**see separate sheet**

**III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability**

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

- the entire international application.  
 claims Nos. 55,58.

because:

the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):

the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 55,58 are so unclear that no meaningful opinion could be formed (*specify*):  
**see separate sheet**

the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.

no international search report has been established for the said claims Nos. .

2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

- the written form has not been furnished or does not comply with the standard.  
 the computer readable form has not been furnished or does not comply with the standard.

**IV. Lack of unity of invention**

1. In response to the invitation to restrict or pay additional fees the applicant has:

restricted the claims.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT**

International application No. PCT/CA00/01108

- paid additional fees.
- paid additional fees under protest.
- neither restricted nor paid additional fees.
- 2.  This Authority found that the requirement of unity of invention is not complied and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.
- 3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is
  - complied with.
  - not complied with for the following reasons:  
**see separate sheet**
- 4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:
  - all parts.
  - the parts relating to claims Nos. .

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. Statement

Novelty (N)	Yes: Claims
	No: Claims 1-62
Inventive step (IS)	Yes: Claims
	No: Claims 1-54,56,57,59-62
Industrial applicability (IA)	Yes: Claims 1-62
	No: Claims

2. Citations and explanations  
**see separate sheet**

**With respect to SECTION I:**

The Applicant should note that with effect from 3 January 2002, the PCT-chapter II-procedure (procedures for international preliminary examination) will be performed within a rationalised framework in the EPO acting as IPEA. The changes foreseen under the rationalised framework and the details thereof were explained in the Official Journal EPO, 11/2001 on pages 539 to 541. Due to this rationalising measure, the use of the sections I to VIII may change from one official communication to the following.

**With respect to SECTION III:**

1. It was not considered appropriate at this stage to analyse in detail all the separate independent claims, since in the view of the following comments, the number of independent claims will in any case have to be reduced.

Due to the multiplicity of independent claims (8 independent claims) directed to

- a method of redirecting data items from a messaging host system to a user's mobile device (Claim 1),
- a method of redirecting E-mail messages from a messaging host system to a user's wireless mobile device (Claim 34),
- a system for redirecting data items from a network to a user's wireless mobile device (Claim 43),
- a method of operating a host system configured to redirect E-mail messages from the Internet to a user's wireless mobile device (Claim 54),
- a method of redirecting data items between a server system and a plurality of mobile data communication devices (Claim 55),
- a computer system (suitable) for redirecting messages from a mobile data communication device (claim 56),
- a method for redirecting messages between a "Internet Service Provider host system" and a plurality of mobile data communication devices (Claim 58), and
- a method of redirecting electronic data items from a host system associated with a user to the user's mobile data communication device (Claim 59),

it is totally unclear for which subject-matter protection is really sought. Therefore, the requirements of Article 6 PCT, in particular *conciseness*, are not met.

It is not possible to form an opinion on the novelty, inventiveness and industrial applicability of the subject-matter of the claims until a set of claims is filed including a reasonable number of independent claims (c.f. Article 6 PCT; Rule 6.1 (a) PCT; PCT-Guidelines, PCT Gazette, III-5.1) and clearly relating to a single invention, including a reasonable number of independent claims which define all the essential features of the invention (cf. PCT Guidelines, PCT-Gazette, III-4.4).

2. A prerequisite in order to be able to form an opinion on novelty, inventive step and industrial applicability (see Article 33 (1) PCT) is that the subject-matter claimed is
- *clear* (Art. 6 PCT). This means in particular that the subject-matter claimed
  - is comprehensible in itself,
  - is related to a technical apparatus or method,
  - is clear with respect to its category,
  - includes all essential features,
  - avoids definitions referring to results to be achieved and
  - is clear with respect to its terminology used (consistency of terminology).
- Further prerequisites defined in Article 6 PCT are support by the description and well defined scope of protection of the subject-matter claimed.

In the present case, Claims **55 and 58** do not meet the above-mentioned requirements in several aspects and to such an extent that no meaningful opinion could be formed. This is because the present wording is so vague and can be interpreted in so many ways that the matter for which protection is sought cannot be determined.

**With respect to clarity**

**In general:**

3. It should be noted that *clarity* is of utmost importance for the purposes of formulating an opinion on the questions whether the claimed invention appears to be novel, to involve an inventive step and to be industrially applicable in view of their function in defining the matter for which protection is sought (cf. PCT Gazette, Section IV, III-4.1). Moreover, the subject-matter claimed should be clear from the wording of the claim alone (cf. PCT Gazette, Section IV, III-4.2).

**In particular:**

4. The subject-matter of Claim 1 is unclear (Art. 6 PCT), because it cannot be understood what is meant by "data items".
5. The subject-matter of Claim 34 is unclear (Art. 6 PCT), because it cannot be understood what is meant by "*wireless* network address" (cf. page 63, line 19). It is unclear what the adjective "wireless" in combination with the network address shall emphasize.

The wording of Claim 34 uses the terms "the E-mail message" and "the E-mail". According to Rule 10.2 PCT, the terminology and signs shall be consistent throughout the whole application. This requirement of Rule 10.2 PCT is not met.

6. The subject-matter of Claim 43 is unclear (Art. 6 PCT).  
Claim 43 claims a system for redirecting data items **from the network to** a user's wireless mobile device (cf. page 65, lines 8 and 9). In the system claimed, a redirector host system is comprised (cf. page 65, line 13). This redirector host system is used **for redirecting** those data items to the user's wireless mobile device (cf. page 65, lines 13 to 15).  
Hence, there is a contradiction in the wording of the claim because on the one hand the *network* redirects the data items and on the other hand the *redirector host system*, i.e. the system claimed, redirects the data items.

Claim 34 is also unclear because it cannot be understood how the redirector host system is able to redirect the data items towards the wireless mobile device.

7. The subject-matter of Claim 54 is unclear (Art. 6 PCT) because it is open to doubt where the E-mail message from the Internet is received (cf. page 67, line 20). Presumably, it is meant that the E-mail message is received at the host system and the E-mail message is destined for a particular user.

Moreover it is unclear whether the "filter rules database" is accommodated within the host system or outside of it.



8. The subject-matter of Claim 55 is totally unclear (Art. 6 PCT) and is therefore excluded from examination.

Claim 55 claims a method of redirecting **data items** between a server and a plurality of mobile data communication devices (cf. page 68, lines 11 and 12). In fact (see page 68, lines 19 to 23) however, **messages** are redirected instead of data items.

It is totally unclear what is meant by the second *method* step "providing a plurality of custom domain *subsystems*". Subsystems are existing or not. They cannot be provided by a method step.

It is unclear where "the particular domain name(s)" (cf. page 68, line 17) stem from.

As a general rule, claims which attempt to define the invention, or a feature thereof, by a *result to be achieved* should be objected to (cf. PCT Gazette, Section IV, III-4.7). Independent Claim 55 does not meet the requirements of Article 6 PCT in that the matter for which protection is sought is not clearly defined. The claim attempts to define the subject-matter **in terms of the result to be achieved** (see page 68, lines 21 and 22, "... so that ..."). In this instance, however, such a formulation is not tolerable because it seems possible to define the subject-matter in more concrete terms, viz. in terms how the effect is to be achieved.

Claim 55 refers in line 22 on page 68, to "**the** domain name system". However, such a domain name system has no antecedent. Hence, the specification in line 22 on page 68 cannot be understood.

It is unclear what is meant by "intended message recipients" in the last line of page 68.

9. Independent Claim 56 does not meet the requirements of Article 6 PCT in that the matter for which protection is sought is not clearly defined. The claim attempts to define the subject-matter **in terms of the result to be achieved** (see page 69,

lines 13 to 15, " ... such that ..."). In this instance, however, such a formulation is not tolerable because it seems possible to define the subject-matter in more concrete terms, viz. in terms how the effect is to be achieved.

The claims shall not include abbreviations (e.g. ISP [see page 69, line 8] ) except abbreviations in parentheses (see PCT-Guidelines, PCT Gazette, Section IV, II-4.14; III-4.1 and III-4.2).

10. The subject-matter of Claim 58 is totally unclear (Art. 6 PCT) and is therefore excluded from examination.

Claim 58 claims a method (suitable) for redirecting messages between an ISP host system and a plurality of mobile data communication devices [plural] (cf. page 69, lines 21 and 22). With respect to page 70, lines 8 and 9, it appears that merely one mobile communications device exists ("the mobile communications device").

On page 70, line 1, redirection settings [plural] are defined. In line 5, reference is made to the redirection setting [singular]. Hence it is unclear whether only one or more redirection settings exist.

On page 70, line 1, reference is made to one or more mobile device users. It is unclear whether the "mobile devices" (and their users) equate with the mobile data communication devices (and their users).

Independent Claim 58 does not meet the requirements of Article 6 PCT in that the matter for which protection is sought is not clearly defined. The claim attempts to define the subject-matter **in terms of the result to be achieved** (see page 70, lines 10 and 11, " ... so that ..."). In this instance, however, such a formulation is not tolerable because it seems possible to define the subject-matter in more concrete terms, viz. in terms how the effect is to be achieved.

With respect to SECTION IV:

The Applicant was advised that all independent claims must be linked by a single inventive concept (Rule 13.1 PCT).

In the present case however, this requirement is not met. The independent claims can - *a priori* - be split into **six** inventions or groups of inventions, as follows:

I-1. Claim 1 claims

- a method of redirecting **data items** from a messaging host system to a user's mobile device. If new data items destined for a user are received at a host system, these data items are copied and the copies are sent to a redirector host system, by which it is **determined whether the new data items are to be sent to the user's mobile device**. If the outcome of this decision is yes (condition), the data items are packaged into an electronic envelope and transmitted.

I-2. Independent Claim 43 claims

- a system for redirecting **data items** from a network to a user's wireless mobile device. A host system is coupled to the network, receives data items and forwards these data items to a **predetermined address on the network**. A redirector host system is associated with the predetermined address and unconditionally redirects the data items to the user's wireless mobile device (without using an electronic envelope).

I-3. Independent Claim 55 claims

- a method of redirecting **data items** between a server system and a plurality of mobile data communication devices. The server (system) receives messages from the mobile data communication devices and then the **address information of the messages is configured so that these messages appear to have been generated at a system hosting a domain name system**. These configured messages are afterwards transmitted to the intended message recipients. In other words, an address emulation or an address masquerade takes place.

**I-4. Independent Claim 59 claims**

- a method of redirecting electronic data items from a host system associated with a user to the user's mobile data communication device. The redirecting process is started if the user is not in the *physical vicinity* of the host system.

and

**II. Independent Claim 34 claims**

- a method of redirecting E-mail messages from a messaging host system to a user's wireless mobile device. If an E-mail message destined for a user is received at a host system, this E-mail message is copied and the copy is sent to a wireless redirector host system. Therein -applying a set of user-defined filtering rules- it is determined whether the E-mail message is to be sent to the user's wireless mobile device. If the outcome of this decision is yes (condition), the E-mail message is packaged, together with the wireless network address of the user's wireless mobile device, into an electronic envelope and transmitted.

**Independent Claim 54 claims**

- a method of operating a host system configured to redirect E-mail messages from the Internet to a user's wireless mobile device. An E-mail message from the Internet is received for a particular user. Firstly, the authorization of the particular user to use the host system is checked by accessing a user profile database. If the user is an authorized user, then secondly a set of user-defined filtering rules are applied to the E-mail message. These user-defined filtering rules determine whether the E-mail message is the type of E-mail message that the user wants to have redirected to the user's wireless mobile device. Lastly, if the E-mail message has passed the filtering rules, the E-mail message, together with the address of the user's wireless mobile device, is repackaged into an electronic envelope which is forwarded to the user's wireless mobile device via a wireless gateway system and a wireless data network.

and

**III. Independent Claim 56 claims**

- a computer system (suitable) for redirecting **messages** from a mobile data communication device. The computer system comprises a redirector component, a first host system and a second host system which is operated by an Internet Service Provider (ISP). The second host system is capable of sending and receiving messages on behalf of the first host system. A message is generated at the mobile data communications device and is sent to said redirector component. **The address information of the received message is configured so that this message appears to have been generated at the first or second host system instead of the mobile data communication device.** In other words, an address emulation or an address masquerade takes place.

**Independent Claim 58 claims**

- a method for redirecting **messages** between a ISP host system and a plurality of mobile data communication devices.  
In a first direction, incoming messages are received at the ISP host system and all messages are directed to a **first address (destination address)**. For each mobile data communication device, redirection settings are configured at the host system and in response to these redirection settings the incoming messages are continuously redirected via a redirector host system to the mobile data communications devices.  
In the opposite direction, outgoing messages generated by the mobile data communications devices are received at the redirector host system. **The address information of the outgoing messages is configured, i.e. said first address is used as an originating address** of the outgoing messages. Then all configured outgoing messages are transmitted. In other words, an address conversion takes place.

It should be noted that the phrases "data item", "message" and "E-mail message" can all have different meanings.

A "data item" is a very general term e.g. for a flag, an End-of-Message delimiter or anything other, i.e. a data item is part of a bit sequence.

A "message" is regarded as an information between two technical apparatuses, i.e. the message is an indication that the transmission has ended, that a training

sequence follows or the indication is interpreted as a command.

An "E-mail message" is regarded as an information between two users of a technical system, i.e. a first user transmits a certain information to a second user.

The above-mentioned separate inventions / groups of invention are not so linked as to form a single general inventive concept.

The technical features applied in inventions I to III as well as the problems to be solved by the different groups of inventions are quite different from each other. Therefore, no single general inventive concept can be ascribed to the inventions specified above.

The groups of inventions are neither linked by a single general inventive concept, nor do they fulfil the requirement of Rule 13.2 PCT that an international patent application may include a group of inventions if there is a technical relationship among those inventions involving **one or more of the same, or corresponding special technical features** which make as a whole a contribution to the state of the art.

The Applicant has not specifically pointed out how the requirements of Rules 13.1 and 13.2 PCT are fulfilled since more than one independent claim is filed.

**With respect to SECTION V:**

**With respect to the priority claimed:**

1. After consideration of the prior art cited in the International Search Report, the Examiner wishes to draw attention to documents **D2** and **D3**.

**D1:** WO-A-99/17 505 (ERICSSON INC.) 8 April 1999 (1999-04-08)

**D2:** WO-A-99/63 709 (*RESEARCH IN MOTION LIMITED*) 9 December 1999  
(1999-12-09)

**D3:** US 09/401,868 dated 23.09.1999  
(priority document of the present application)

2. According to the PCT-Guidelines (see PCT-Guidelines in PCT Gazette, Section IV, V-1.2 to V-1.4, V-2.2) normally the filing date of the "first application" must be claimed as a priority, i.e. the application disclosing *for the first time* any or all of the subject-matter of the international application. This requirement does not seem to be met in the present case.

In the present case, the claimed priority document (see **D3**, US 09/401,868 filing date 23.09.1999) of the present application does **not** appear to be the **first application** of the subject-matter of the current international application.

The subject-matter claimed has already been **disclosed** in an even earlier application, i.e. document **D2** (WO-A-99/63 709, filing date 09.12.1999), which originates from the **same applicant** (*RESEARCH IN MOTION LIMITED*) and from the **same inventor** (G. Mousseau, M. Lazaridis).

The Examiner has come to this conclusion since the **technical principle**, taught in the document **D2**, in the priority document **D3**, and specifically by the subject-matter as defined in the independent claims of the current international application, is the same. All these documents relate to redirecting data items, messages or E-mail messages.

The result of this is that all or at least all essential technical features of present claims are derivable from this earlier disclosure **D2**.

It should be noted that "if it is found that the application to which the priority claim is directed is in fact **not** the **first application** -in the above sense-, but some or all of the subject-matter is disclosed in a still earlier application originating from the same inventor, the **priority claim is invalid as far as** the subject-matter was already disclosed in the still earlier application".

To this extent, the priority claim is **invalid** and the effective date of the current international application becomes the date of its filing, in the present case 25.09.2000 (see Article 2 (xi) PCT, Article 8 PCT, Rule 64.1 (b) PCT; PCT-International Preliminary Examination Guidelines, PCT-Gazette, Section IV, V-1.4).

3. Due to the fact that the mentioned priority claim of the present international application is no longer valid, the content of the earlier document **D2** (published

09.12.1999) is considered as comprised in the **state of the art** (Rule 64.1 PCT) and can be used in the examination of novelty and inventive step of the subject-matter according to the features of the Claims as presently on file.

**With respect to novelty and/or inventive step of the subject-matter claimed:**

4. As already stated above, **D2** (WO-A-99/63 709; see whole description and figures) discloses the same subject-matter as the present application and in particular the subject-matter as claimed in present independent claims. Therefore, the independent Claims 1, 34, 43, 54, 55, 56, 58 and 59 do not meet the requirements of Article 33 (1) and (2) PCT, novelty.
  
5. Document **D1** (WO-A-99/17 505; see page 1; see page 11, line 13 to page 15, line 21) discloses, in accordance with all features of Claim 1, a method of redirecting data items (see page 11, lines 13-17) from a messaging host system (see fig. 1, private server 16) to a user's mobile device ("remote resource 30", page 12, line 20; page 7, lines 18-24, "portable personal communicator 30"), comprising the steps of :
  - detecting a new data item (E-mail) for the user at the messaging host system (see page 13, lines 1 and 2; page 14, line 1 to 4; see fig. 7, steps 38-46-44);
  
  - forwarding a copy of the new data item to a redirector host system (= fixed computer 20 with forwarding program 32; see page 14, lines 7 and 8; see also fig. 7, steps 48);
  
  - determining (see fig. 7, step 56) whether the new data item should be redirected from the redirector host system to the user's mobile device (see page 14, lines 11 to 23);  
**and if** the new data item should be redirected (see page 14, line 18 to 20), then packaging the new data item into an electronic envelope and transmitting the electronic envelope to the user's mobile device (see page 14, line 22, to page 15, line 21).



Hence, the subject-matter of Claim 1 is not new and therefore the criteria of Article 33 (1) and (2) PCT are not met.

6. It should be noted that even if it could be argued that an independent claim were novel, based on minor differences between the features of this claim and those disclosed in documents **D2** or **D1** respectively, the subject-matter of this independent claim would still not involve an inventive step having regard to the disclosures of D2 or D1 respectively, especially as these documents disclose the same object and the same type of solution as claimed in the independent claim (Articles 33 (1) and (3) PCT).
7. The additional features of the dependent Claims 2 to 33 either alone or in combination, do not add anything of inventive significance to Claim 1.

The remaining additional features of dependent Claims 2 to 33 do not appear to contain matter which in combination with the subject-matter of Claim 1, would involve an inventive step. Most of them are known, can directly be derived from the documents cited (D2 or D1) or are simply embodiments without any inventive significance of their own.

Hence dependent Claims 2 to 33 do at least not involve an inventive step and therefore these claims do not meet the requirements of Article 33 (1) and (3) PCT.

8. The other independent Claims 34, 43, 54, 56, and 59 are deemed to lack at least an inventive step in the light of documents D2 and D1. Hence these claims do not meet the requirements of Article 33 (1) and (3) PCT. The same applies with respect to their dependent claims.

**Mention of certain published documents, Rules 64.3 and 70.10 PCT:**

9.	Application No. Patent No.	Publication date	Filing date	Priority date
	WO-A-99/63 709	09.12.1999	28.05.1999	29.05.1998 (= <b>D2</b> )

The current report is based on the assumption that all claims do not enjoy priority rights from the filing date of the priority document. If it later turns out that this is not correct, i.e. the priority were valid, the document WO-A-99/63 709 (**D2**) cited in the International search Report could nevertheless become relevant. In some national or regional patent systems, it is allowed to use documents with an X,P-indication in the international search report for objections based on novelty only (cf. e.g. Article 54 (3) EPC). When amending the claims, this situation should be borne in mind in order to avoid further (novelty) objections during the following national or regional patent grant procedures.

**Formal aspects of the application:**

- 10). The independent claims have not been properly cast in the two-part form, with those features which in combination are part of the prior art (D2, D1) being placed in the preamble. Thus they do not meet the requirements of Rule 6.3 (b) PCT.
- 11). Reference signs in parentheses have not been inserted neither to the preamble nor to the characterising portion of the claims to increase their intelligibility. Hence, the criteria of Rule 6.2 (b) PCT are not met.
- 12). Neither document **D1** nor document **D2** mentioned in the international search report have been identified in the description nor has the relevant background art disclosed therein been briefly discussed. Thus, the requirements of Rule 5.1 (a) (ii) PCT are not fulfilled.
- 13). According to Rule 5.1 (a)(iii) PCT, the description shall disclose the invention, as claimed, in such terms that the *technical problem* (even if not expressly stated as

such) and its solution can be understood.

The Applicant has not clearly specified the problem(s) to be solved by the invention(s) and the solution(s) as claimed.

- 14). On page 9 (last paragraph), on page 36 (line 9) and on page 55 (last paragraph), the statements are obviously unnecessary and therefore should be excised from the application (Rule 9.1 (iv) PCT; see also PCT International Preliminary Examination Guidelines, PCT GAZETTE - Section IV, III-4.3a). Furthermore, it should be noted that Article 6 PCT clearly states that the claim or the claims shall define the subject-matter for which protection is sought. Therefore, any other embodiment which is outside the scope of the claims is not covered by the international application regardless of what is said in the description.
  
- 15). Obviously, on pages 53 to 55, the wordings of some independent Claims (e.g. Claims 58, 55, 56) have been repeated. If this were the only support by the description for these claims, it would be insufficient.

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>8831-137 SJP</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/CA 00/ 01108</b>	International filing date (day/month/year) <b>25/09/2000</b>	(Earliest) Priority Date (day/month/year) <b>23/09/1999</b>
Applicant <b>RESEARCH IN MOTION LIMITED et al.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.  
 It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

contained in the international application in written form.

filed together with the international application in computer readable form.

furnished subsequently to this Authority in written form.

furnished subsequently to this Authority in computer readable form.

the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2.  **Certain claims were found unsearchable** (See Box I).

3.  **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

the text is approved as submitted by the applicant.

the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

the text is approved as submitted by the applicant.

the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

as suggested by the applicant.

because the applicant failed to suggest a figure.

because this figure better characterizes the invention.

1  
 None of the figures.

**INTERNATIONAL SEARCH REPORT**

International Application No

CA 00/01108

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/58

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 17505 A (ERICSSON INC.) 8 April 1999 (1999-04-08)	1-6, 8, 14-31, 34-38, 40-47, 49-56, 58
A	page 11, line 13 -page 15, line 21	7
X,P	WO 99 63709 A (RESEARCH IN MOTION LIMITED) 9 December 1999 (1999-12-09)	1-51, 54-56, 58, 59
	page 4, line 1 -page 24, line 23	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

26 January 2001

Date of mailing of the international search report

01/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Behringer, L.V.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

CA 00/01108

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9917505 A	08-04-1999	US 6138146 A AU 9311298 A BR 9812557 A CN 1272278 T EP 1021896 A NO 20001603 A	24-10-2000 23-04-1999 25-07-2000 01-11-2000 26-07-2000 29-05-2000
WO 9963709 A	09-12-1999	AU 3924499 A	20-12-1999

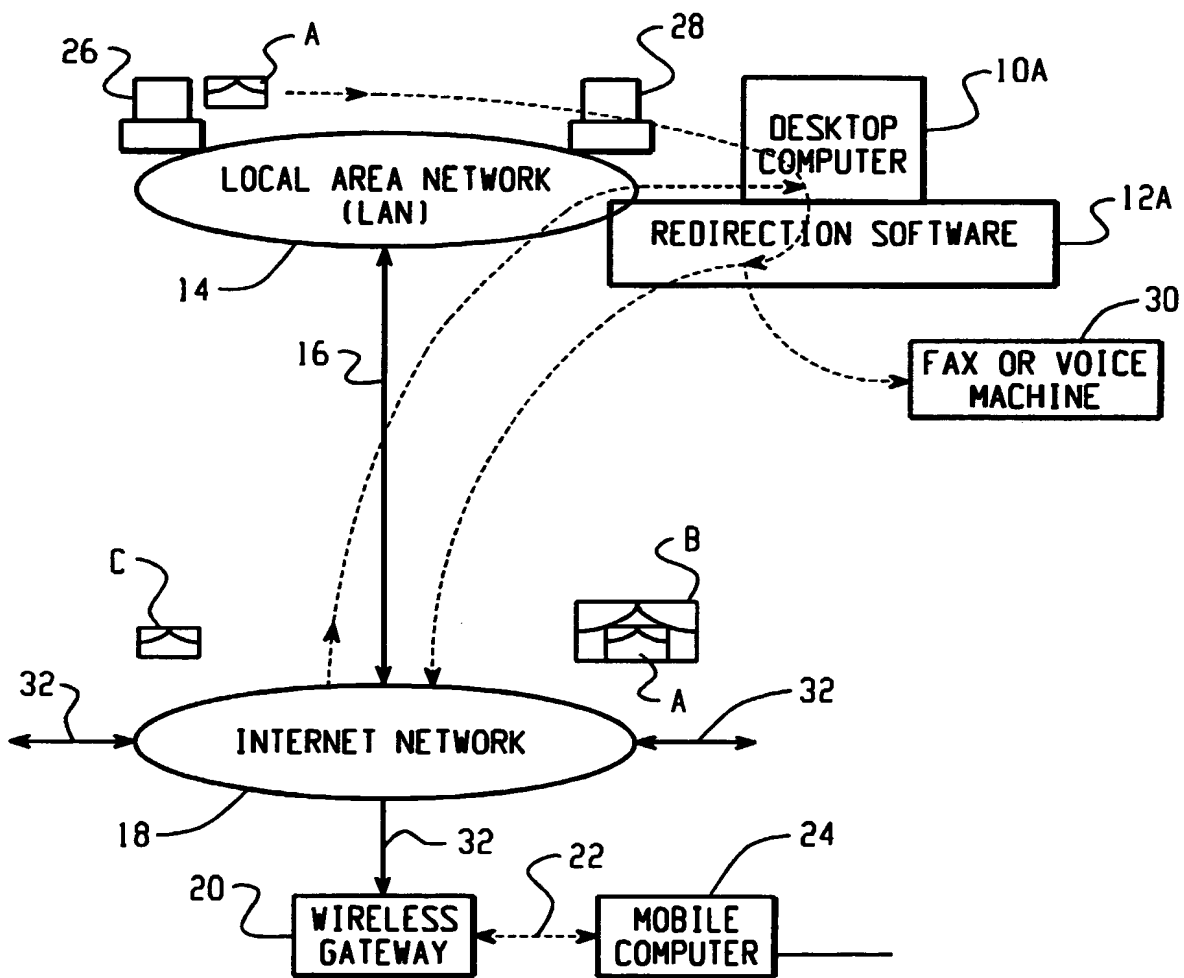


Fig. 1

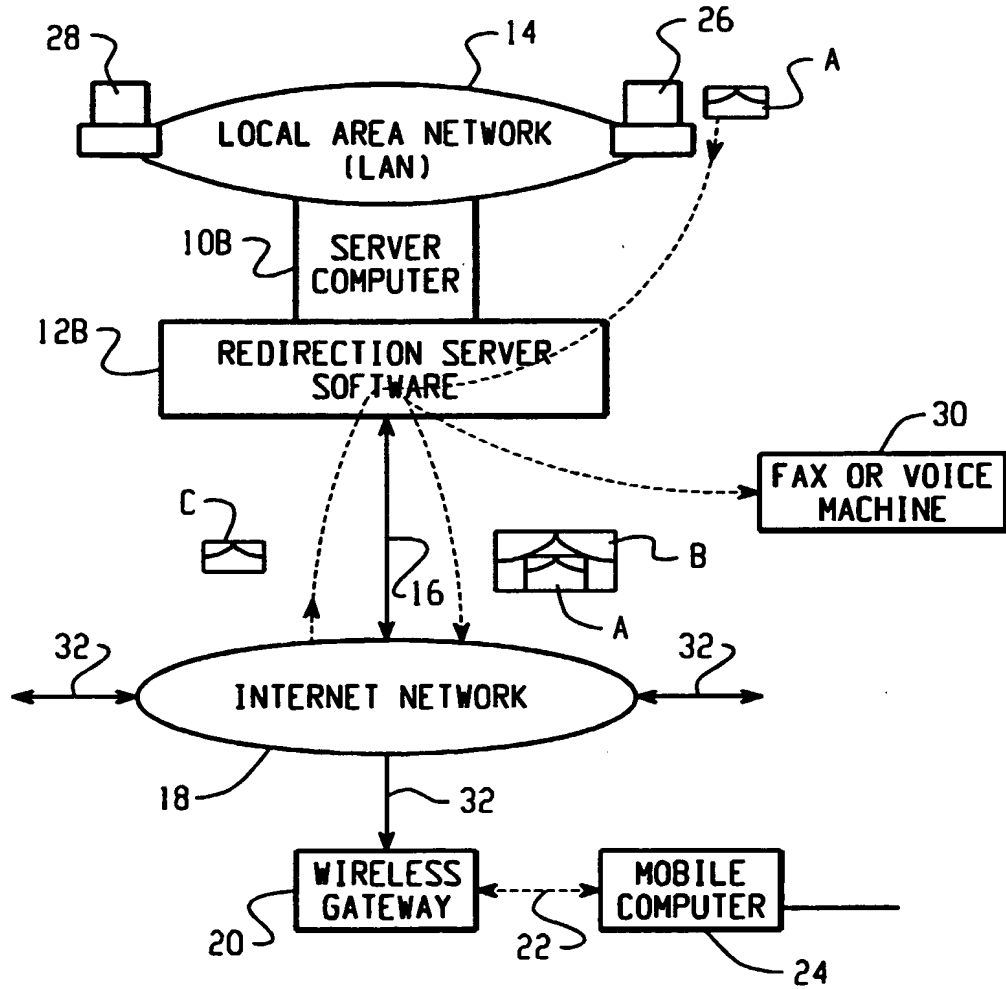


Fig. 2



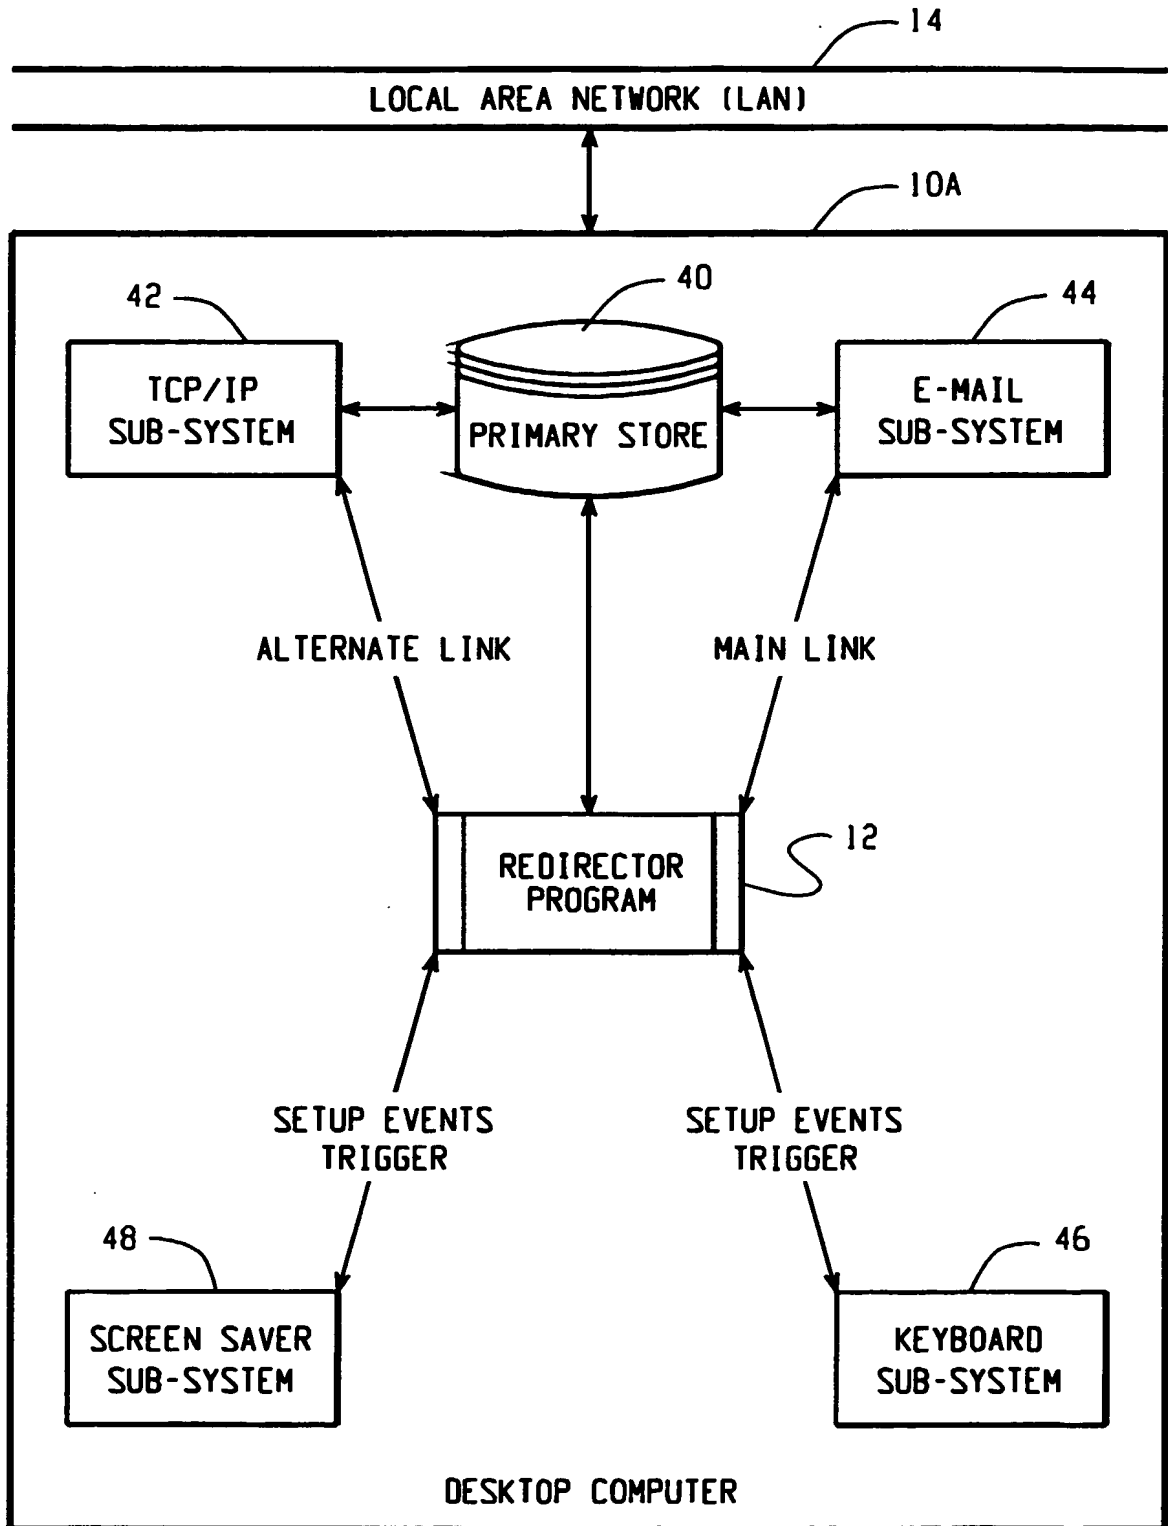


Fig. 3

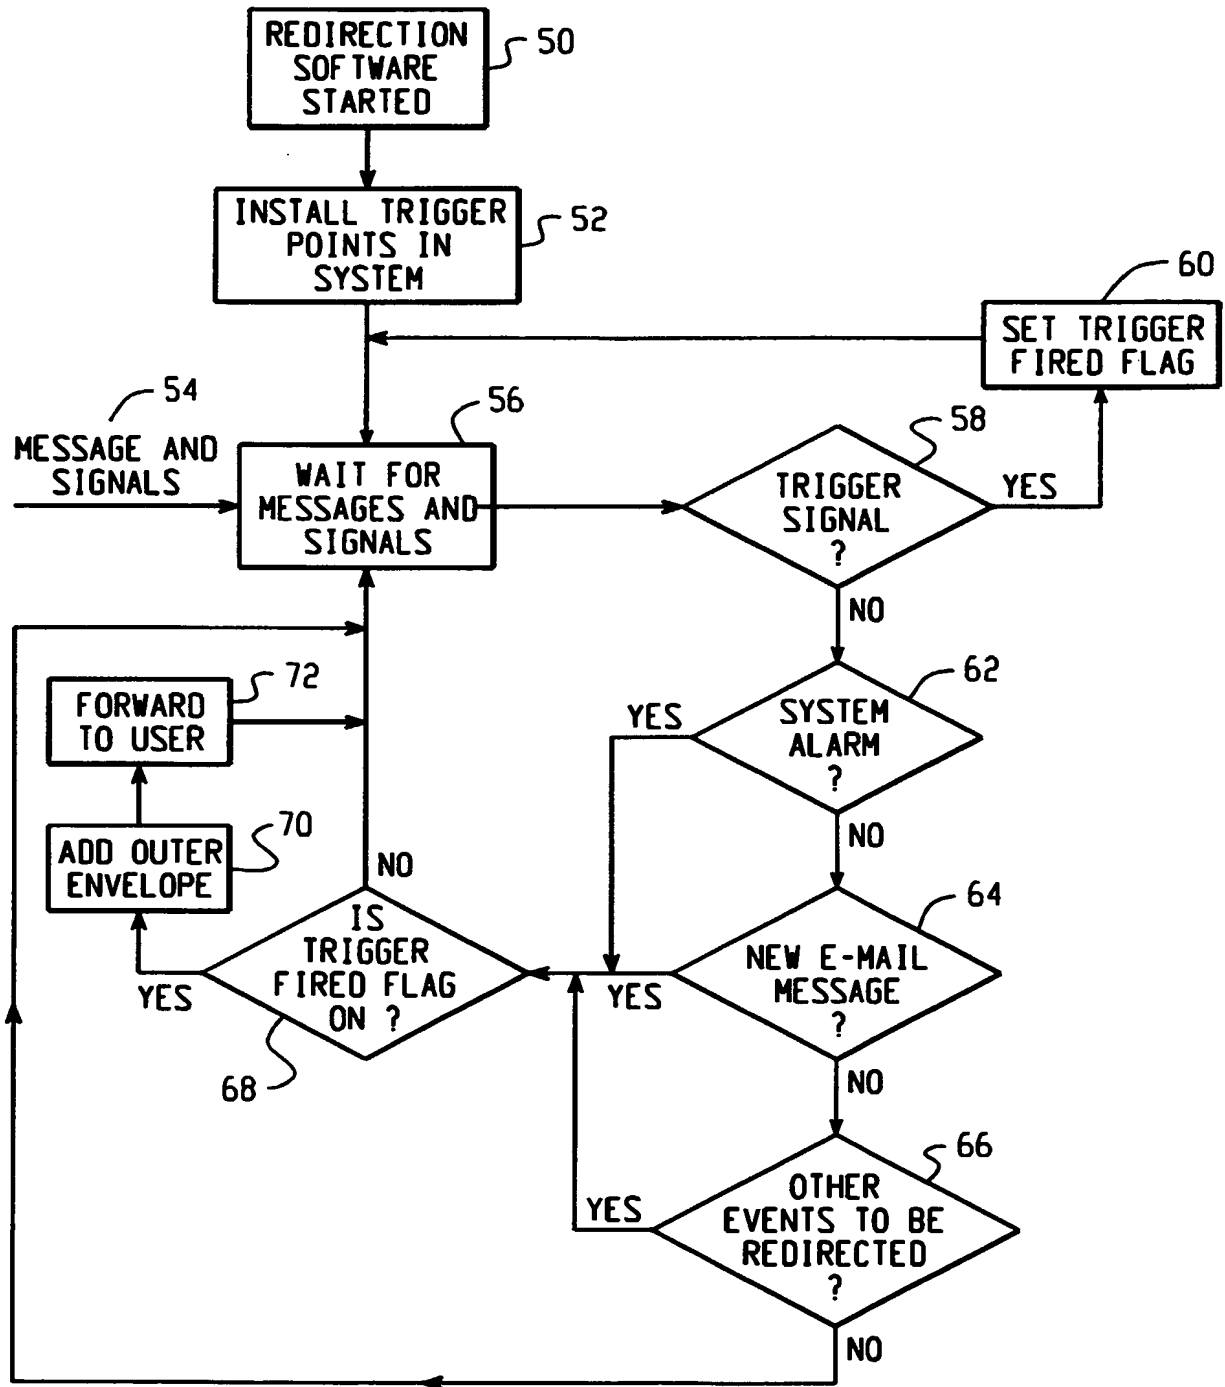


Fig. 4

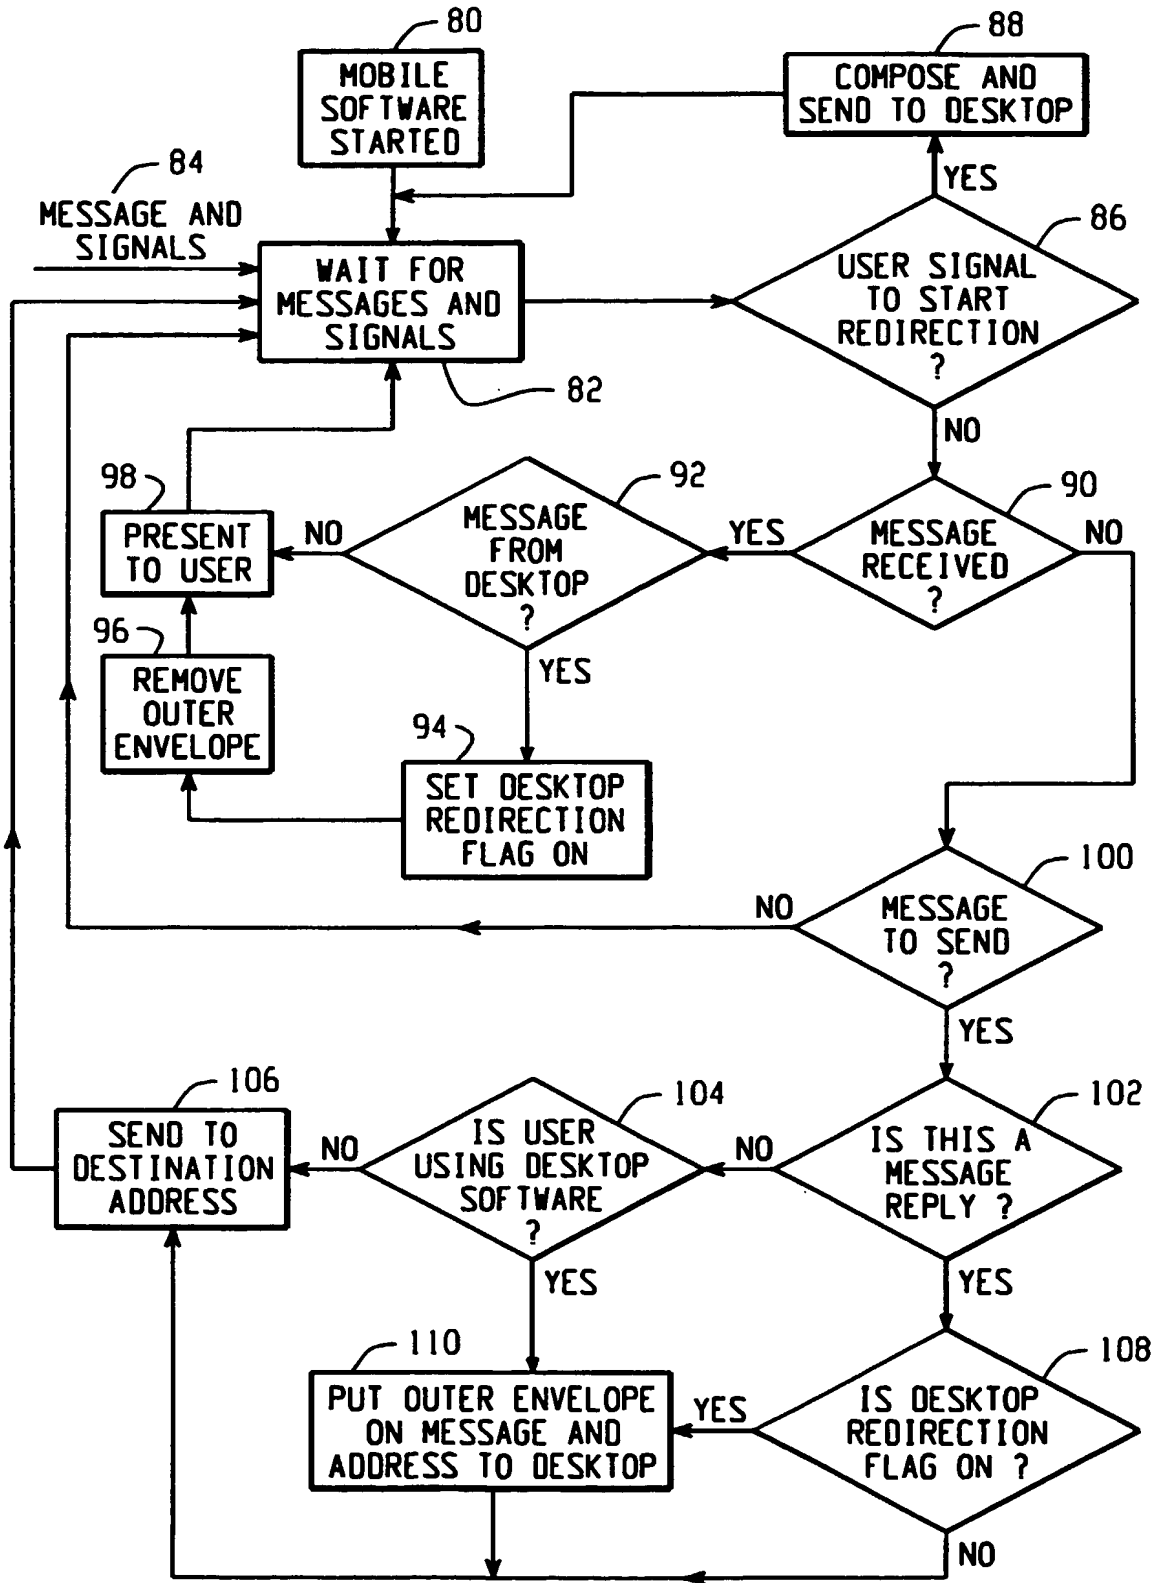


Fig. 5

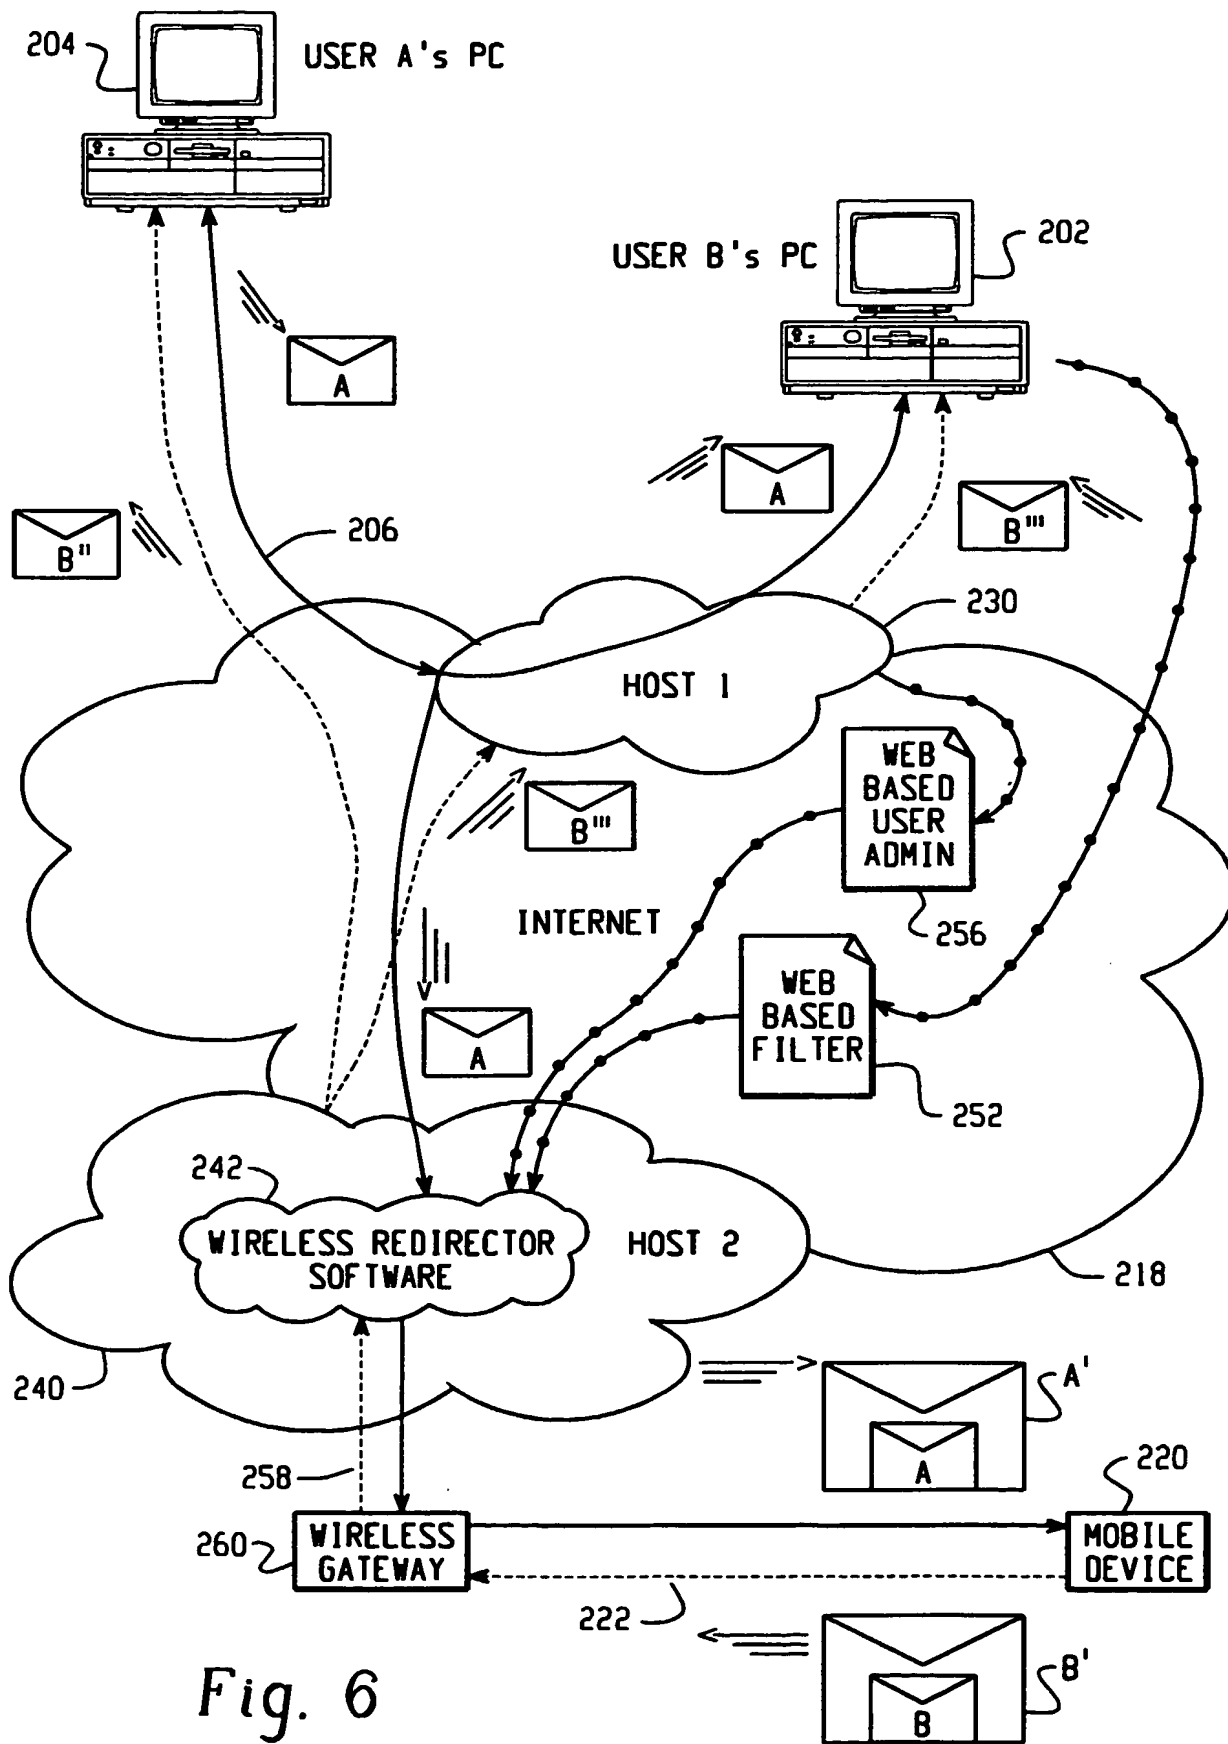


Fig. 6

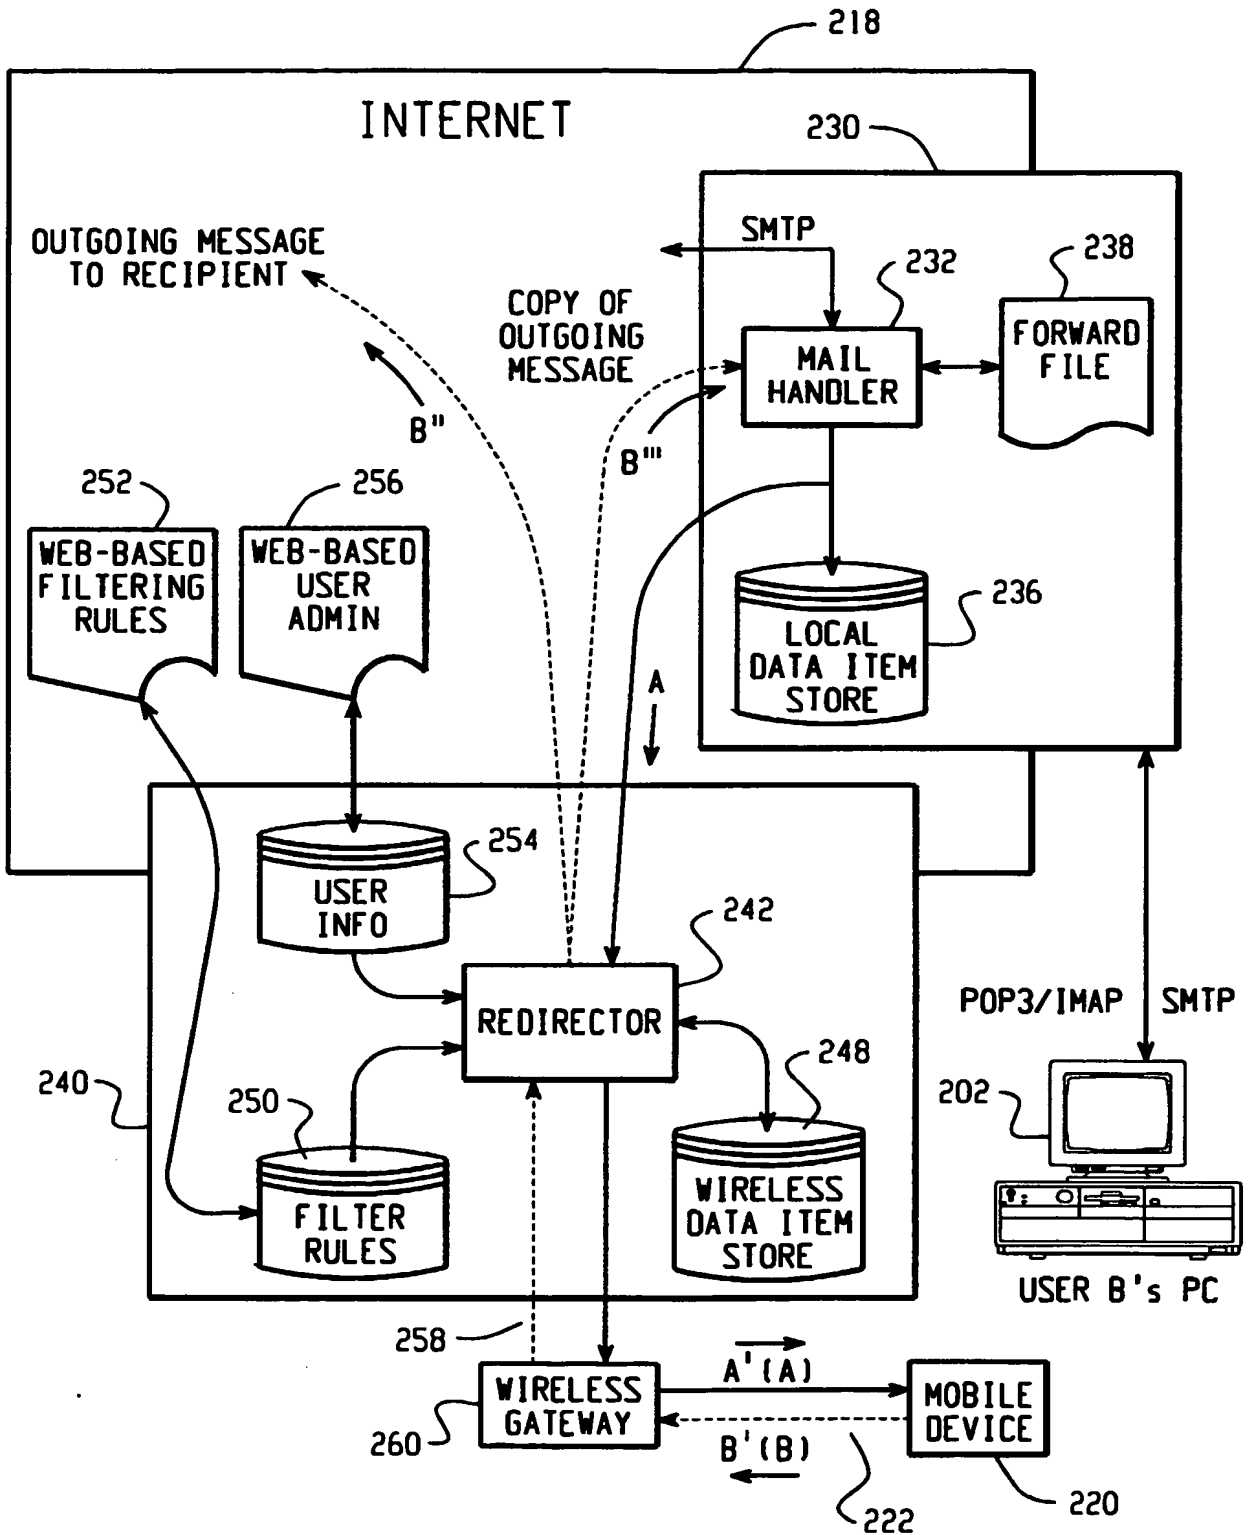


Fig. 7

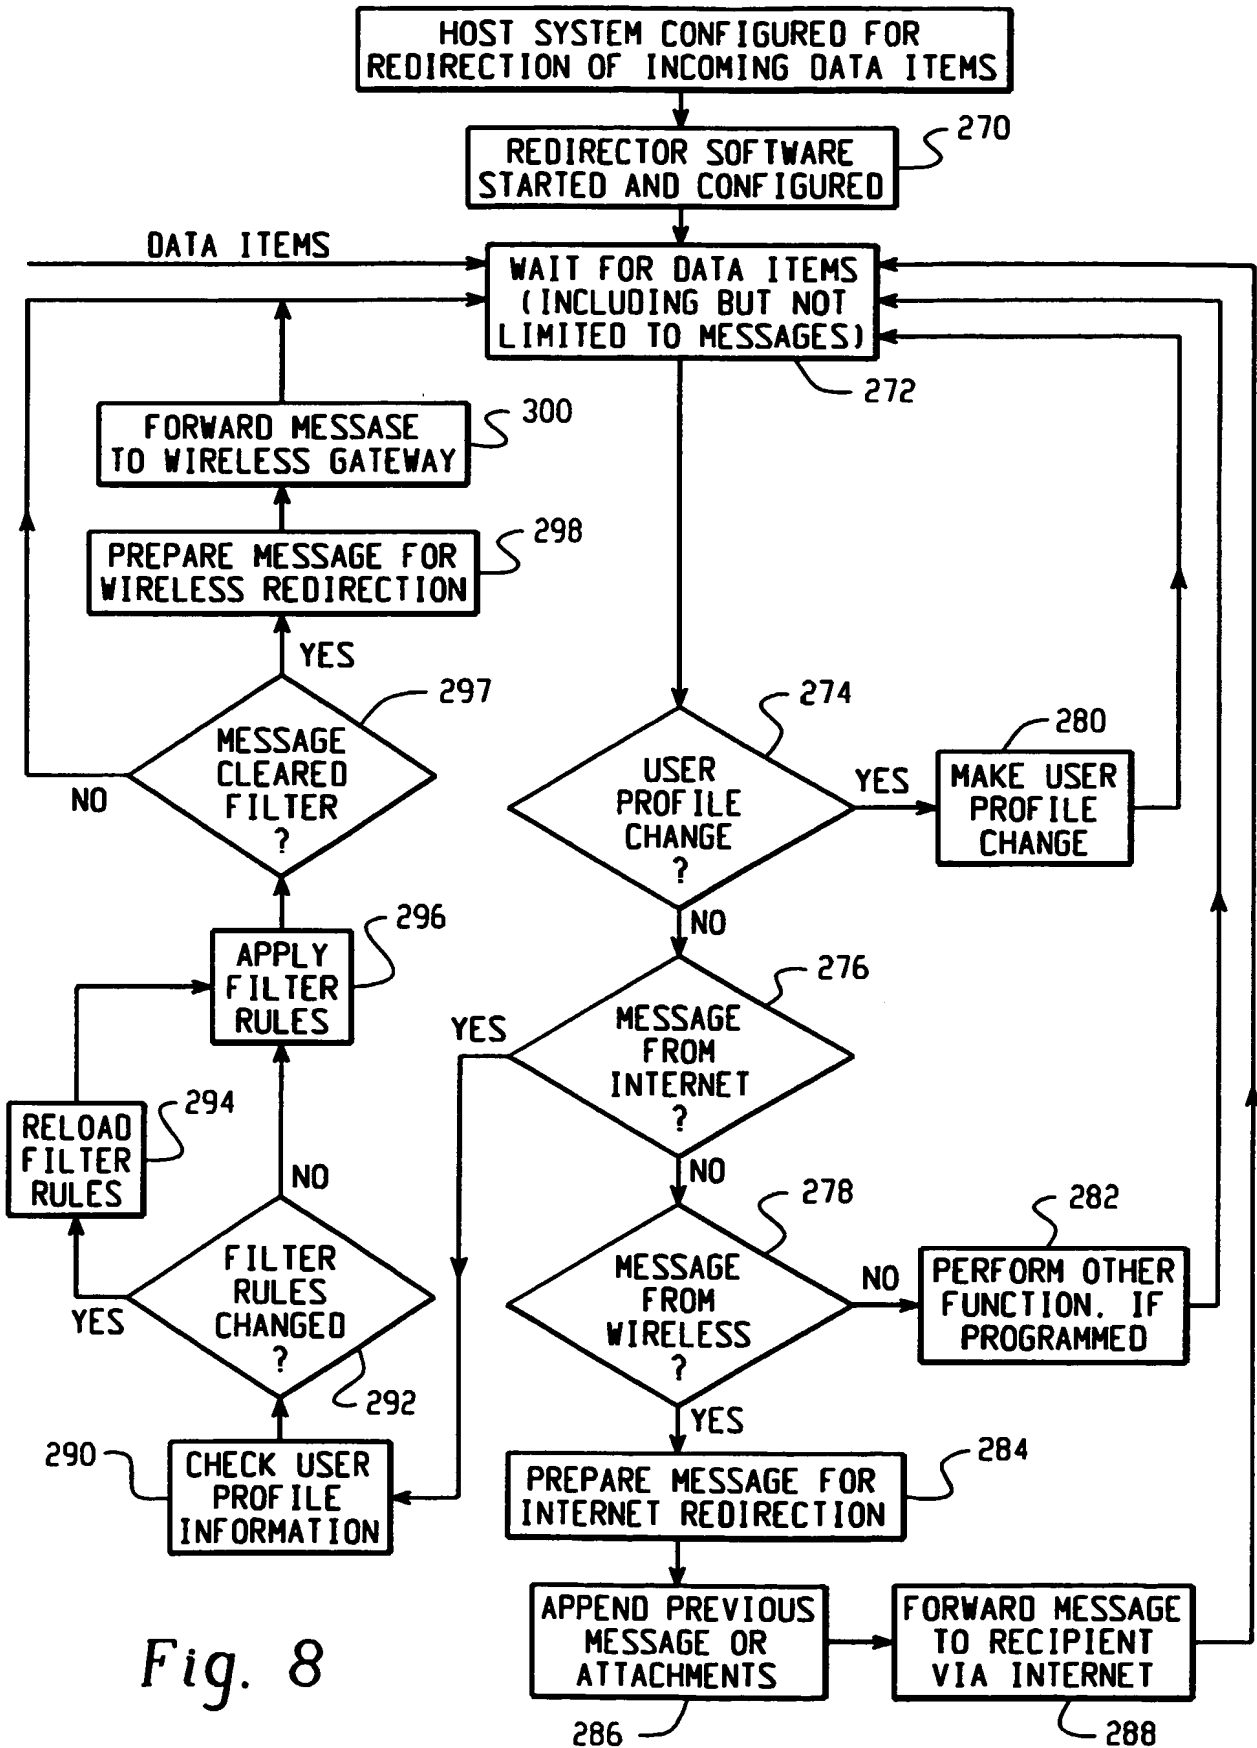


Fig. 8

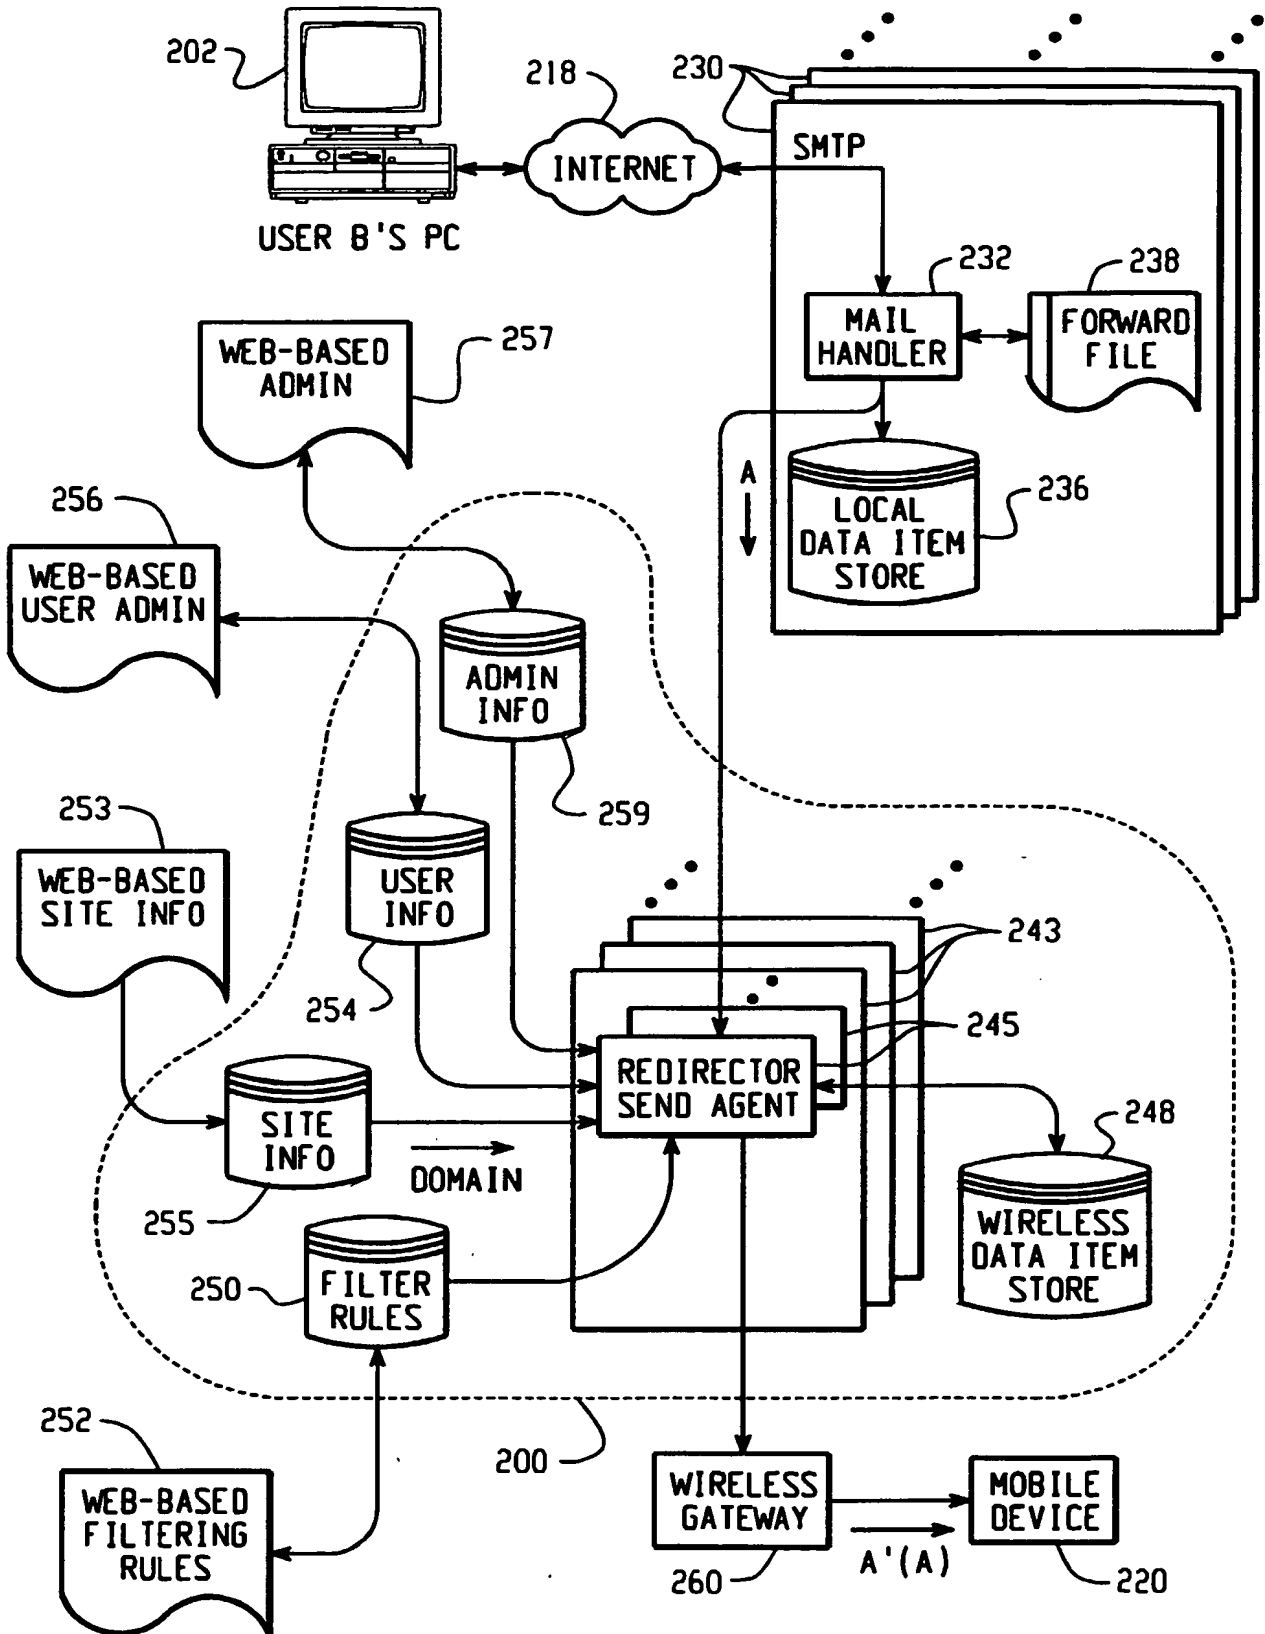


Fig. 9

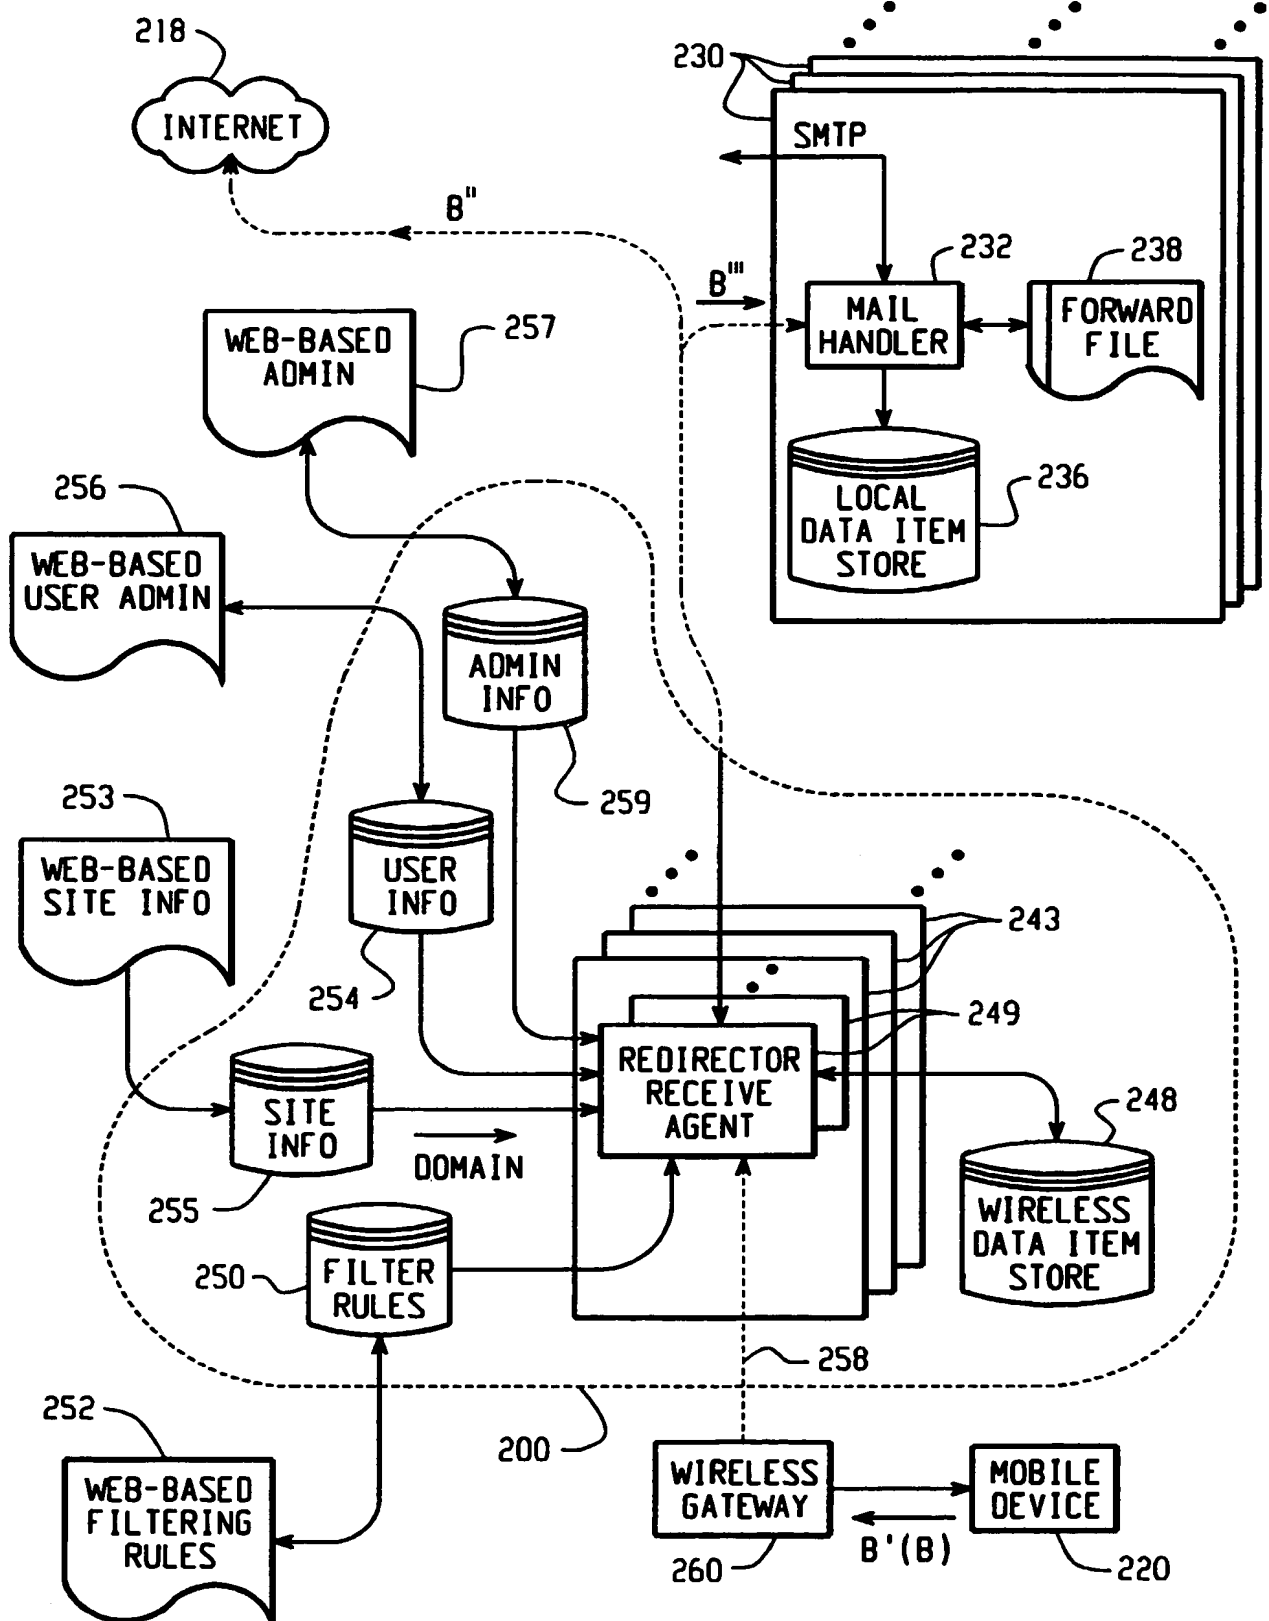


Fig. 10



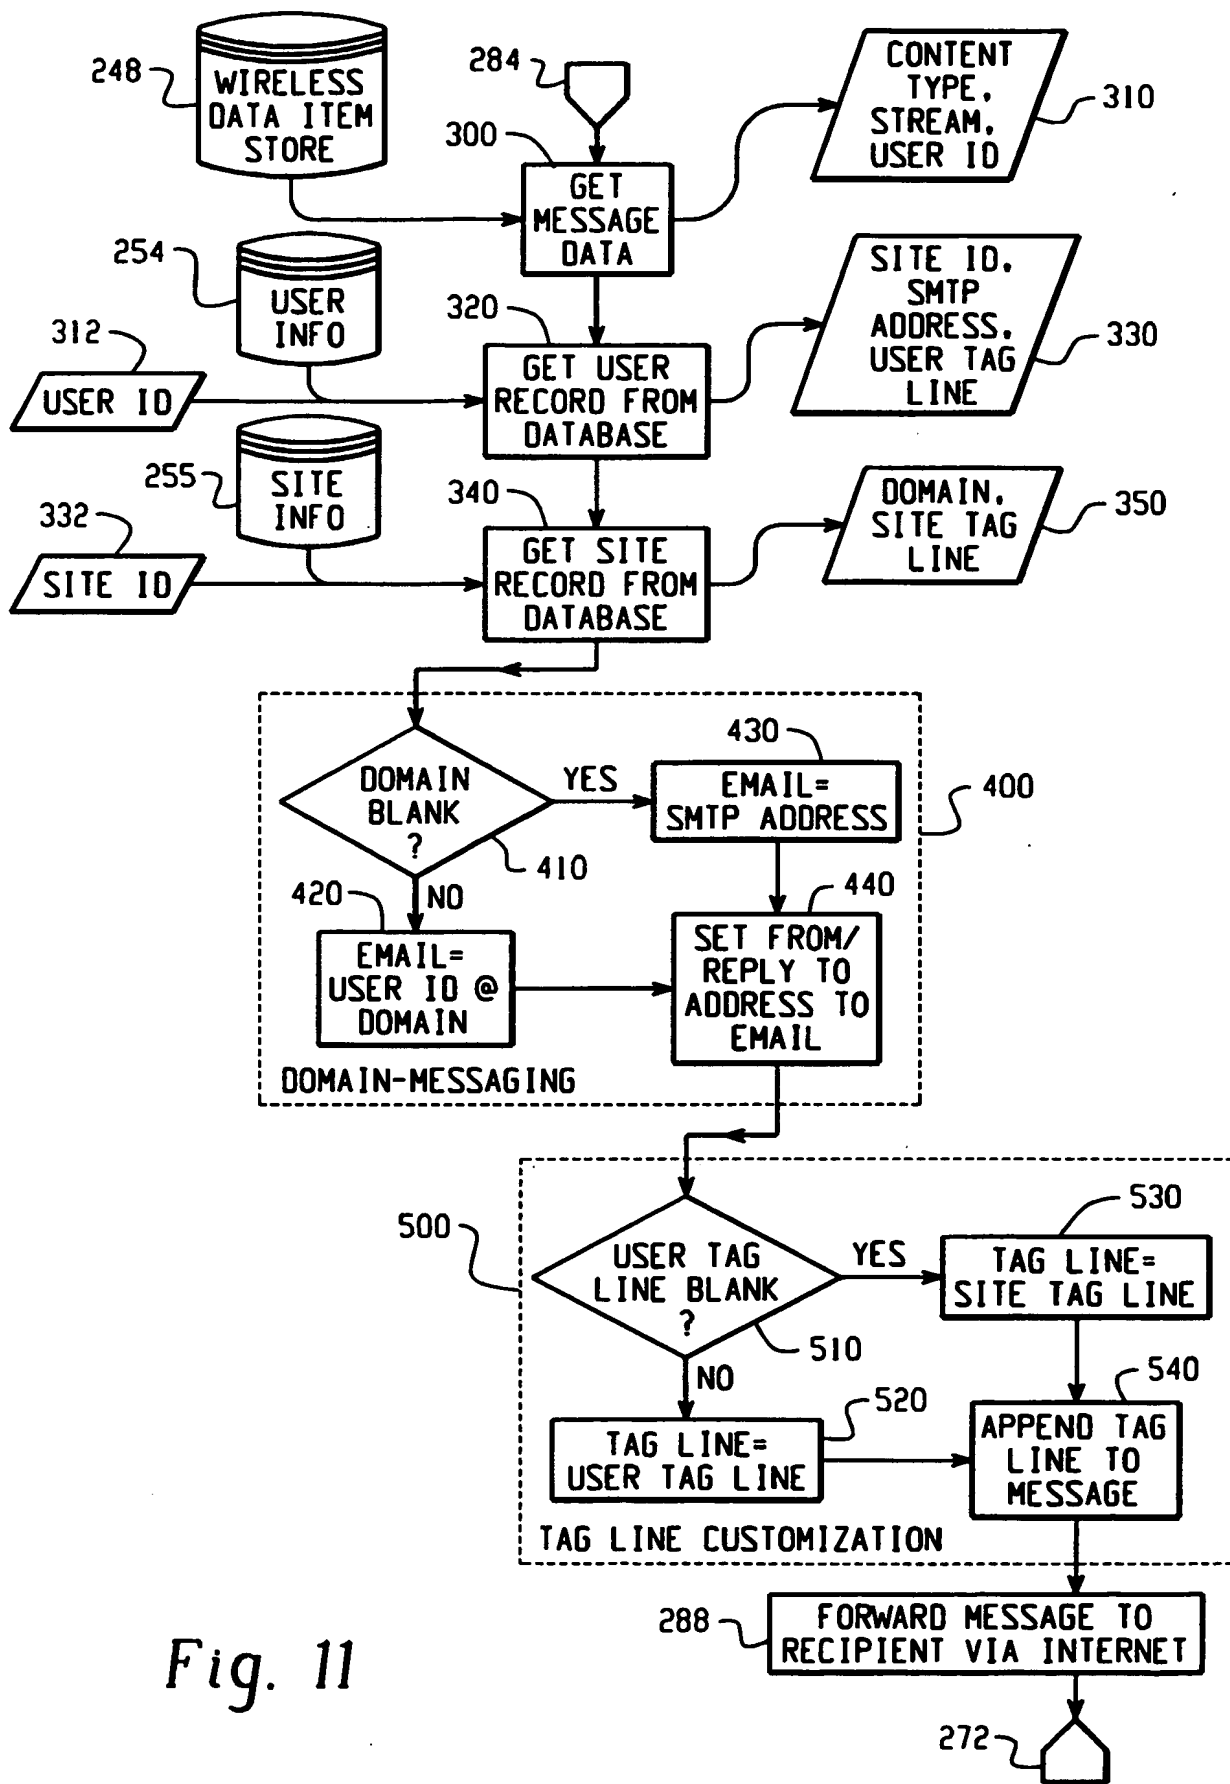


Fig. 11

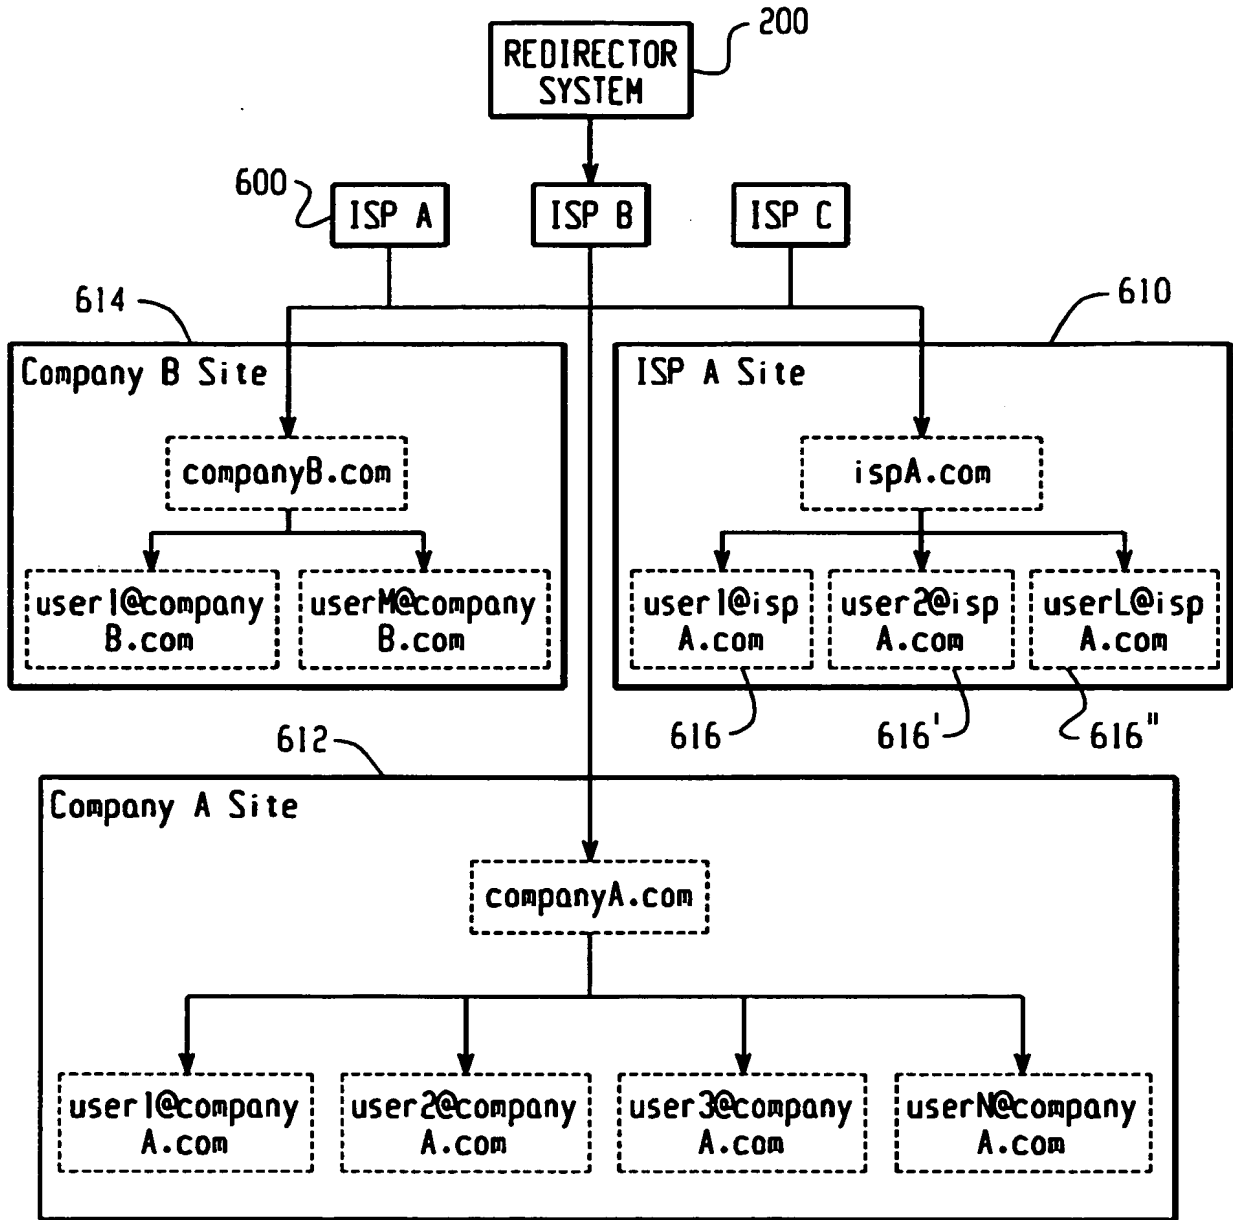


Fig. 12

10/088784

JC13 Rec'd PCT/PTO 21 MAR 2002

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**Title of the Invention**

**System and Method for Pushing Information between a  
Host System and a Mobile Data Communication Device**

**Inventors**

**Barry Gilhuly  
Anh Van  
Steve Rahn  
Gary Mousseau  
Mihal Lazaridis**

12/1/01

10/088784  
EL647388995US

BACKGROUND OF THE INVENTION

5

1. Field of the Invention

The present invention is directed toward the field of redirecting information between a host system and a mobile data communication device.

10

2. Description of the Related Art

15

Present systems and methods for replicating information from a host system to a user's mobile data communication device are typically "synchronization" systems in which the user's data items are warehoused (or stored) at the host system for an indefinite period of time until the user synchronizes the mobile device to the host system. In these types of systems and methods, when replication of the warehoused data items to the mobile device is desired, the user typically places the mobile device in an interface cradle that is electrically connected to the host system via some form of local, dedicated communication, such as a serial cable or an infrared or other type of wireless link.

20

Software executing on the mobile data communication device then transmits commands via the local communications link to the host system to cause the host to begin transmitting the user's data items for storage in a memory bank of the mobile device.

In these synchronization schemes, the mobile unit "pulls" the warehoused information from the host system in a batch-mode each time the user desires to replicate information between the two devices. Thus, the two systems (host and mobile) maintain the same data items only after a user-initiated synchronization sequence.

A general problem with these synchronization systems is the fact that the data in the mobile device is only current at the moment of synchronization with the host. Five minutes later a new message could be sent to the user, but the user would not receive that message until the next time the systems are synchronized. Thus, a user may fail to respond to an emergency update or message because the user only periodically synchronizes the system, such as once per day.

Other problems with these systems include: (1) the amount of data to be reconciled between the host and the mobile device can become large if the user does not "synchronize" on a daily or hourly basis, leading to bandwidth difficulties, particularly when the mobile device is communicating via a wireless packet-switched network; and (2) reconciling large amounts of data, as can accrue in these batch-mode synchronization systems, can require a great deal of communication between the host and the mobile device, thus leading to a more complex, costly and energy-inefficient system.

Thus, there is a general need in this field for a more automated, continuous, efficient, flexible, and reliable system of ensuring that user data items are replicated (in real time) at the user's mobile device.

## SUMMARY OF THE INVENTION

A system and method for pushing information from a host system to a mobile data communication device upon sensing a triggering event is provided. A redirector program operating at the host system enables a user to continuously redirect certain user-selected data items from the host system to the user's mobile data communication device upon detecting that one or more user-defined triggering events has occurred. The redirector program operates in connection with event generating applications and repackaging systems at the host system to configure and detect a particular user-defined event, and then to repackage the user-selected data items in an electronic wrapper prior to pushing the data items to the mobile device.

Using the redirector program, the user can select certain data items for redirection, such as E-mail messages, calendar events, meeting notifications, address entries, journal entries, personal reminders etc. Having selected the data items for redirection, the user can then configure one or more event triggers to be sensed by the redirector program, which then initiates redirection of the user data items upon sensing one or more of the event triggers. These user-defined trigger points (or event triggers) may be external events, internal events or networked events. Once an event has triggered redirection of the user data items, the host system then repackages these items in a manner that is transparent to the mobile data communication device, so that information on the mobile device appears similar to information on the user's host system.

The redirector program also provides a set of software-implemented control functions for determining the type of mobile data communication device and its address, for programming a preferred list of message types that are to be redirected, and for determining whether the mobile device can receive and process certain types of message attachments, such as word processor or voice attachments. The mobile device control functions are initially set by the user of the mobile device at the host system. These functions can then be altered on a global or per message basis by transmitting a command message from the mobile device to the host system.

In an alternative embodiment, the redirector program executes on a network server, and the server is programmed to detect numerous redirection event triggers over the network from multiple user desktop computers coupled to the server via a local-area-network ("LAN"). The server can receive internal event triggers from each of the user desktops via the network, and can also receive external event triggers, such as messages from the users' mobile data communication devices. In response to receiving one of these triggers, the server redirects the user's data items to the proper mobile data communication device. This alternative configuration could also include an Internet or Intranet-located web server including the redirector program that could be accessible through a secure Web page or other user interface. In this configuration, the redirector program could be located on an Internet Service Provider's ("ISP's") system, and the user would configure (and reconfigure) the program controls over an Internet connection to the ISP's system.

In another embodiment, the redirector program operates at the host system and at the user's mobile data communication device. In this configuration, the user's mobile device operates similarly to the host system described below, and is configured in a similar fashion to push certain user-selected data items from the mobile device to the user's host system (or some other computer) upon detecting an event trigger at the mobile device. This configuration provides two-way pushing of information from the host to the mobile device and from the mobile device to the host.

The primary advantage of the present invention is that it provides a system and method for triggering the continuous and real-time redirection of user-selected data items from a host system to a mobile data communication device. Other advantages of the present invention include: (1) flexibility in defining the types of user data to redirect, and in defining a preferred list of message types that are to be redirected or preferred senders whose messages are to be redirected; (2) flexibility in configuring the system to respond to numerous internal, external and networked triggering events; (3) transparent repackaging of the user data items in a variety of ways such that the mobile data communication device appears as though it were the host system; (4) integration with other host system components such as E-mail, TCP/IP, keyboard, screen saver, Web pages and certain programs that can either create user data items or be configured to provide trigger points; and (5) the ability to operate locally on a user's desktop system or at a distance via a network server or through a secure Internet connection.



According to the present invention, there is provided a method of redirecting data items from a messaging host system to a user's mobile device, comprising the steps of: detecting a new data item for the user at the messaging host system; forwarding a copy of the new data item to a redirector host system; 5 determining whether the new data item should be redirected from the redirector host system to the user's mobile device; and if the new data item should be redirected, then packaging the new data item into an electronic envelope and transmitting the electronic envelope to the user's mobile device.

According to the present invention, there is provided a method of 10 redirecting E-mail messages from a messaging host system to a user's wireless mobile device, comprising the steps of: detecting an E-mail message for the user at the messaging host system; forwarding a copy of the E-mail message from the messaging host system to a wireless redirector host system; receiving the forwarded E-mail message at the wireless redirector host system and applying a set 15 of user-defined filtering rules that determine whether or not to redirect the E-mail to the user's wireless mobile device via a wireless network coupled to the wireless redirector host system; and if the filtering rules determine that the E-mail message is of the type that should be redirected, then redirecting the E-mail to the user's wireless mobile device by packaging the E-mail message in an electronic envelope 20 that includes the wireless network address of the user's wireless mobile device.

According to the present invention, there is provided a system for redirecting data items from a network to a user's wireless mobile device, comprising: a messaging host system coupled to the network for receiving data

items associated with a particular user and for forwarding the received data items to a predetermined address on the network; and a redirector host system associated with the predetermined address for receiving the forwarded data items from the messaging host system and for redirecting those data items to the user's wireless mobile device.

According to the present invention, there is provided a method of operating a host system configured to redirect E-mail messages from the Internet to a user's wireless mobile device, comprising the steps of: receiving an E-mail message from the Internet for a particular user; accessing a user profile database to determine whether the particular user is an authorized user of the host system; if the user is an authorized user, then accessing a filter rules database to apply a set of user-defined filtering rules to the E-mail message that dictate whether the E-mail message is the type of message that the user wants to have redirected to its wireless mobile device; and if the E-mail message clears the filtering rules, then repackaging the E-mail message into an electronic envelope including the address of the user's wireless mobile device and forwarding the electronic envelope to a wireless gateway system for transmission onto a wireless data network associated with the user's wireless mobile device.

According to the present invention, there is provided a method of redirecting data items between a server system and a plurality of mobile data communication devices, comprising the steps of: providing at least one redirection program at the server system; providing a plurality of custom domain subsystems; providing a user profile for each of the plurality of custom domain subsystems at

the server system, where the user profiles each associate a particular domain name and user name with a particular mobile data communication device; receiving messages generated at the mobile data communications device at the server; configuring address information of the messages so that the messages appear to have been generated at a system hosting the domain name system; and transmitting the configured messages to intended message recipients.

According to the present invention, there is provided a computer system for redirecting messages from a mobile data communication device, comprising: a first host system operated at a second host system, the second host system operated by an ISP and is capable of sending and receiving messages on behalf of the first host system; a redirector component that upon receiving a message generated at the mobile data communications device, by a message sender destined for a message recipient, configures address information of the received message such that the received message appears to have been generated at the first host system instead of at the mobile data communication device or the second host system.

According to the present invention, there is provided a method for redirecting messages between a ISP host system and a plurality of mobile data communication devices is provided, the method comprising the steps of: configuring redirection settings for one or more mobile device users at the host system; receiving incoming messages directed to a first address at the ISP host system from a plurality of message senders; in response to the redirection setting, continuously redirecting the incoming messages from the ISP host system to the

mobile data communication device via a redirector host system; receiving outgoing messages generated at the mobile communications device at the redirector host system; configuring address information of the outgoing messages so that the first address is used as an originating address of the outgoing messages; and  
5 transmitting the configured outgoing messages to message recipients.

According to the present invention, there is provided a method of redirecting electronic data items from a host system associated with a user to the user's mobile data communication device, comprising the steps of: configuring an external redirection event at the host system, wherein the external redirection event  
10 is the host system sensing whether the user is in the physical vicinity of the host system; receiving electronic data items at the host system; and if the host system senses that the user is not in the physical vicinity of the host system, then continuously redirecting the received data items to the user's mobile data communication device until the host system senses that the user is in the vicinity of  
15 the host system.

These are just a few of the many advantages of the present invention, as described in more detail below. As will be appreciated, the invention is capable of other and different embodiments, and its several details are capable of modifications in various respects, all without departing from the spirit of the  
20 invention. Accordingly, the drawings and description of the preferred embodiments set forth below are to be regarded as illustrative in nature and not restrictive.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention satisfies the needs noted above as will become apparent from the following description when read in conjunction with the accompanying drawings wherein:

5           FIG. 1 is a system diagram showing the redirection of user data items from a user's desktop PC (host system) to the user's mobile data communication device, where the redirector software is operating at the user's desktop PC;

          FIG. 2 is a system diagram showing the redirection of user data items from a network server (host system) to the user's mobile data communication device,  
10           where the redirector software is operating at the server;

          FIG. 3 is a block diagram showing the interaction of the redirector software with other components of the host system in FIG. 1 (the user's desktop PC) to enable the pushing of information from the host system to the user's mobile data communication device;

15           FIG. 4 is a flow chart showing the steps carried out by the redirector software operating at the host system;

          FIG. 5 is a flow chart showing the steps carried out by the mobile data communication device to interface with the redirector software operating at the host system;

20           FIG. 6 is a system diagram showing the redirection of user data items from a user's host system to the user's mobile data communication device, where the redirector software is operating at the wireless redirector host system;

          FIG. 7 is a block diagram showing the interaction of the redirector software with other components of the host system in FIG. 6 to enable the pushing

of information from the host system to the user's mobile data communications device;

FIG. 8 is a flow chart showing the steps carried out by the redirector software operating at the wireless redirector host system.

5 FIG. 9 is a block diagram showing the interaction of the redirector send agent software with other components of the host systems to enable the pushing of information from the host system to the user's mobile data communications device;

FIG. 10 is a block diagram showing the interaction of the redirector receive agent software with other components of the host systems to enable the pushing of information to the Internet from the user's mobile data communications device;

10 FIG. 11 is a flowchart showing the steps carried out by the redirector receive agent operating at the redirector agent host server in the case of redirecting email messages with domain-messaging and tag line customisation; and

15 FIG. 12 is a hierarchical view of an example of the different types of domains, represented by sites, which can interface with a single redirector system.

## DETAILED DESCRIPTION OF THE DRAWINGS

Referring now to the drawings, FIG. 1 is an example system diagram showing the redirection of user data items (such as message A or C) from a user's desktop PC (host system) 10A to the user's mobile data communication device 24, where the redirector software 12 is operating at the user's PC 10A. As used in this application, the term "host system" refers to the computer where the redirector software is operating. In the preferred embodiment, the host system is a user's desktop PC 10A. Alternatively, however, the host system could be a network server (10B, see FIG. 2) connected to the user's PC via a local-area network ("LAN"), or it could be a Web server (240, see FIG. 6) operating through a secure network connection or operating at an external ISP, or the host system could be any other system that is capable of communicating with the user's desktop PC.

Message A in FIG. 1 represents an internal message sent from desktop 26 to the user's host system 10A via LAN 14. Message C in FIG. 1 represents an external message from a sender that is not directly connected to LAN 14, such as the user's mobile data communication device 24, some other user's mobile device (not shown), or any user connected to the Internet 18. Message C also represents a command message from the user's mobile data communication device 24 to the host system 10A. As described in more detail in FIG. 3, the desktop host system 10A preferably includes, along with the typical hardware and software associated with a workstation or desktop computer, the redirector program 12, a TCP/IP subsystem 42, a primary message store 40, an E-mail subsystem 44, a screen saver subsystem 48, and a keyboard subsystem 46.

In FIG. 1, the host system 10A is the user's desktop system, typically located in the user's office. The desktop host system 10A is connected to a LAN 14, which also connects to other computers 26, 28 that may be in the user's office or elsewhere. The LAN 14, in turn, is connected to a wide area network ("WAN") 18, preferably the Internet, which is defined by the use of the Transmission Control Protocol/Internet Protocol ("TCP/IP") to exchange information, but which, alternatively, could be any other type of WAN. The connection of the LAN 14 to the WAN 18 is via high bandwidth link 16, typically a T1 or T3 connection. The WAN 18 in turn is connected to a variety of gateways 20, via connections 32. A gateway forms a connection or bridge between the WAN 18 and some other type of network, such as an RF wireless network, cellular network, satellite network, or other synchronous or asynchronous land-line connection.

In the example of FIG. 1, a wireless gateway 20 is connected to the Internet for communicating via wireless link 22 to a plurality of wireless mobile data communication devices 24. Also shown in FIG. 1 is machine 30, which could be a FAX machine, a printer, a system for displaying images (such as video) or a machine capable of processing and playing audio files, such as a voice mail system.

The present invention includes the ability to redirect certain message attachments to such an external machine 30 if the redirector program configuration data reflects that the mobile device 24 cannot receive and process the attachments, or if the user has specified that certain attachments are not to be forwarded to mobile device 24, even if such device can process those attachments. By way of



example, consider an E-mail sent to a user that includes three attachments -- a word processing document, a video clip and an audio clip. The redirection program 12 could be configured to send the text of the E-mail to the remote device 24, to send the word processing document to a networked printer located near the user, to send the video clip to a memory store accessible through a secure connection through the internet and to send the audio clip to the user's voice mail system. This example is not intended to limit the breadth and scope of the invention, but rather to illustrate the variety of possibilities embodied in the redirection concept.

The preferred mobile data communication device 24 is a hand-held two-way wireless paging computer, a wirelessly enabled palm-top computer, a mobile telephone with data messaging capabilities, or a wirelessly enabled laptop computer, but could, alternatively be other types of mobile data communication devices capable of sending and receiving messages via a network connection 22.

Although it is preferable for the system to operate in a two-way communications mode, certain aspects of the invention could be beneficially used in a "one and one-half" or acknowledgment paging environment, or even with a one-way paging system. The mobile data communication device 24 includes software program instructions that work in conjunction with the redirector program 12 to enable the seamless, transparent redirection of user-selected data items. FIG. 4 describes the basic method steps of the redirector program 12, and FIG. 5 describes the steps of the corresponding program operating at the mobile device 24.

In an alternative embodiment of the present invention, not explicitly shown in the drawings, the mobile device 24 also includes a redirector program. In this embodiment, user selected data items can be replicated from the host to the mobile device and vice versa. The configuration and operation of the mobile device 24 having a redirector program is similar to that described herein with respect to FIGs. 1-4.

A user of the present invention can configure the redirector program 12 to push certain user-selected data items to the user's mobile data communication device 24 when the redirector 12 detects that a particular user-defined event trigger (or trigger point) has taken place. User-selected data items preferably include E-mail messages, calendar events, meeting notifications, address entries, journal entries, personal alerts, alarms, warnings, stock quotes, news bulletins, etc. Alternatively, the user-selected data items could include any other type of message that is transmitted to the host system 10A, or that the host system 10A acquires through the use of intelligent agents, such as data that is received after the host system 10A initiates a search of a database, a Web site or a bulletin board. In some instances, only a portion of the data item is transmitted to the mobile device 24 in order to minimize the amount of data transmitted via the wireless network 22. In these instances, the mobile device 24 can optionally send a command message (C) to the host system 10A to retrieve more or all of the data item if the user desires to receive it.

The user-defined event triggers include external events, internal events and networked events. External events preferably include: (1) receiving a command

message (such as message C) from the user's mobile data communication device to begin redirection, or to execute some other command at the host, such as a command to enable the "preferred list mode" (described below), or to add or subtract a particular sender from the preferred list of the preferred list mode; (2) receiving a similar message from some external computer; and (3) sensing that the user is no longer in the vicinity of the host system; although, alternatively, an external event can be any other detectable occurrence that is external to the host system 10.

Internal events may include a calendar alarm, screen saver activation, keyboard timeout, programmable timer, or any other user-defined event that is internal to the host system 10. Networked events are user-defined messages that are transmitted to the host system from another computer coupled to the host system 10A via a network to initiate redirection. These are just some of the event triggers that could be used with the present invention to initiate replication of the user-selected data items from the host system 10A to the mobile device 24. Other types of triggers are also within the scope of the present invention.

FIG. 1 shows an E-mail message A being communicated over LAN 14 from computer 26 to the user's desktop system 10A (also shown in FIG. 1 is an external message C, which could be an E-mail message from an Internet user, or could be a command message from the user's mobile device 24). Once the message A (or C) reaches the primary message store of the host system 10A, it can be detected and acted upon by the redirection software 12. The redirection software 12 can use many methods of detecting new messages. The preferred

method of detecting new messages is using Microsoft's ® Messaging API ("MAPI"), in which programs, such as the redirector program 12, register for notifications or 'advise syncs' when changes to a mailbox take place. Other methods of detecting new messages could also be used.

5            Assuming that the redirector program 12 is activated, and has been configured by the user (either through the sensing of an internal, external, or networked event) to replicate certain user data items (including messages of type A or C) to the mobile device 24, when the message A is received at the host system 10A, the redirector program 12 detects its presence and prepares the  
10            message for redirection to the mobile device 24. In preparing the message for redirection, the redirector program 12 may compress the original message A, it may just compress the message header, or it may encrypt the entire message A to create a secure link to the mobile device 24.

              The address of the user's mobile data communication device 24, the type of  
15            device, and whether the device 24 can accept certain types of attachments, such as word processing or voice attachments, are also programmed into the redirector 12. If the user's type of mobile device cannot accept a particular type of attachments, then the redirector 12 can be programmed to route those attachments to a fax or voice number where the user is located using an attached fax or voice machine 30.

20            The redirector 12 may also be programmed with a "preferred list mode" operation that is configured by the user either at the host system 10A, or remotely from the user's mobile data communication device 24 by transmitting a command message C. The "preferred list" in the "preferred list mode" contains a list of

senders (other users) whose messages are to be redirected, or it may contain a list of message characteristics that determine whether a message is to be redirected, or it may contain both a list of senders and a list of message characteristics. For example, a message characteristic may relate to the size of the message, or the type of message, or whether the message has any attachments, or whether the message is originating from a particular domain. If activated, the preferred list mode causes the redirector program 12 to operate like a filter, only redirecting certain user data items based on whether the data item was sent from a sender on the preferred list or has certain message characteristics that if present will trigger or suppress redirection of the message.

In the example of FIG. 1, if desktop system 26 was operated by a user on the preferred list of host system 10A, and the preferred list option was activated, then message A would be redirected. If, however, desktop 26 was operated by a user not on the host system's preferred list, then message A would not be redirected, even if the user of the host system had configured the redirector to push messages of type A. The user of the host system 10A can configure the preferred list directly from the desktop system 10A, or, alternatively, the user can send a command message (such as C) from the mobile device 24 to the desktop system 10A to activate the preferred list mode, or to add or delete certain senders or message characteristics from the previously configured preferred list. In this manner, the user can remotely control the operation of the preferred list mode filter so as to dynamically alter the filtering characteristics of the redirector program 12.

After the redirector 12 has determined that a particular message should be redirected, and it has prepared that message for redirection, the software 12 then sends the message A to a secondary memory store located in the mobile device 24. In doing so, the redirector preferably repackages message A as an E-mail with an outer envelope B that contains the addressing information of the mobile device 24, although alternative repackaging techniques and protocols could be used, such as a TCP/IP repackaging and delivery method (most commonly used in the alternative server configuration shown in FIG. 2). The wireless gateway 20 requires this outer envelope information B in order to know where to send the redirected message A. Once the message (A in B) is received by the mobile device 24, the outer envelope B is removed, and the original message A is placed in the secondary memory store within the mobile device 24. By repackaging and removing the outer envelope in this manner, the present invention causes the mobile computer 24 to appear to be at the same physical location as the host system 10, thus creating a transparent system.

In the case where message C is representative of an external message from a computer on the Internet 18 to the host system 10A, and the host 10A has been configured to redirect messages of type C, then in a similar manner to message A, message C would be repackaged with an outer envelope B and transmitted to the user's mobile device 24. In the case where message C is representative of a command message from the user's mobile device 24 to the host system 10A, the command message C is not redirected, but is acted upon by the host system 10A.

If the redirected user data item is an E-mail message, as described above, the user at the mobile device 24 sees the original subject, sender's address, destination address, carbon copy and blind carbon copy information. When the user replies to this message, or when the user authors a new message, the software operating at the mobile device 24 adds a similar outer envelope to the reply message (or the new message) to cause the message to be routed first to the user's host system 10A, which then removes the outer envelope and redirects the message to the final destination, such as back to computer 26. In the preferred embodiment, this results in the outgoing redirected message from the user's host system 10A being sent using the E-mail address of the host mailbox, rather than the address of the mobile device, so that it appears to the recipient of the message that the message originated from the user's desktop system 10A rather than the mobile data communication device 24. Any replies to the redirected message will then be sent to the desktop system 10A, which if it is still in redirector mode, will repackage the reply and re-send it to the user's mobile data device 24, as described above.

FIG. 2 is an alternative system diagram showing the redirection of user data items from a network server host system 10B to the user's mobile data communication device 24, where the redirector software 12 is operating at the server 10B. This configuration is particularly advantageous for use with message servers such as Microsoft's<sup>®</sup> Exchange Server, which is normally operated so that all user messages are kept in one central location (or mailbox store) on the server instead of in a memory store within each user's desktop PC. This configuration

has the additional advantage of allowing a single system administrator to configure and keep track of all users having messages redirected. If the system includes encryption keys, these too can be kept at one place for management and update purposes.

5 In this alternative configuration, server 10B preferably maintains a user profile for each user's desktop system 26, 28, including information such as whether a particular user can have data items redirected, which types of message and information to redirect, what events will trigger redirection, the address of the users' mobile data communication device 24, the type of mobile device, and the  
10 user's preferred list, if any. The event triggers are preferably detected at the user's desktop system 26, 28 and can be any of the internal, external or networked events listed above. The desktop systems 26, 28 preferably detect these events and then transmit a message to the server host computer 10B via LAN 14 to initiate redirection. Although the user data items are preferably stored at the server host  
15 computer 10B in this embodiment, they could, alternatively, be stored at each user's desktop system 26, 28, which would then transmit them to the server computer 10B after an event has triggered redirection.

As shown in FIG. 2, desktop system 26 generates a message A that is transmitted to and stored at the host system 10B, which is the network server  
20 operating the redirector program 12. The message A is for desktop system 28, but in this embodiment, user messages are stored at the network server 10B. When an event occurs at desktop system 28, an event trigger is generated and transmitted to the network server 10B, which then determines who the trigger is from, whether



that desktop 28 has redirection capabilities, and if so, the server 10B (operating the redirector program 12) uses the stored configuration information to redirect message A to the mobile computer 24 associated with the user of desktop system 28.

5           As described above with reference to FIG. 1, message C could be either a command message from a user's mobile data communication device 24, or it could be a message from an external computer, such as a computer connected to the Internet 18. If the message C is from an Internet computer to the user's desktop system 28, and the user has redirection capabilities, then the server 10B detects the  
10           message C, repackages it using electronic envelope B, and redirects the repackaged message (C in B) to the user's mobile device 24. If the message C is a command message from the user's mobile device 24, then the server host computer 10B simply acts upon the command message using the redirector program 12.

15           Turning now to FIG. 3, a block diagram is set forth that demonstrates the interaction of the redirector software 12 with additional components of the desktop host system 10A shown in FIG. 1 (*i.e.*, the desktop PC) to enable more fully the pushing of information from the host system 10A to the user's mobile data communication device 24. These additional components are illustrative of the  
20           type of event-generating systems that can be configured and used with the redirector software 12, and of the type of repackaging systems that can be used to interface with the mobile communication device 24 to make it appear transparent to the user.

The desktop host system 10A is connected to LAN 14, and can send and receive data, messages, signals, event triggers, etc., to and from other systems connected to the LAN 14. Through the LAN, the system 10A can also communicate with external networks 18, 22, such as the Internet or a wireless data network. In addition to the standard hardware, operating system, and application programs associated with a typical microcomputer or workstation, the desktop system 10A includes the redirector program 12, a TCP/IP sub-system 42, an E-mail sub-system 44, a primary data storage device 40, a screen saver sub-system 48, and a keyboard sub-system 46. The TCP/IP and E-mail subsystems 42, 44 are examples of repackaging systems that can be used to achieve the transparency of the present invention, and the screen saver and keyboard sub-systems 46, 48 are examples of event generating systems that can be configured to generate event messages or signals that trigger redirection of the user selected data items.

The method steps carried out by the redirector program 12 are described in more detail in FIG. 4. The basic functions of this program are: (1) to configure and setup the user-defined event trigger points that will start redirection; (2) to configure the types of user data items for redirection and optionally configure a preferred list of senders whose messages are to be redirected; (3) to configure the type and capabilities of the user's mobile data communication device; (4) to receive messages and signals from the repackaging systems and the event generating systems; and (5) to command and control the redirection of the user-selected data items to the mobile data communication 24 device via the

repackaging systems. Other functions not specifically enumerated could also be integrated into this program.

The E-Mail sub-system 44 is the preferred link to repackaging the user-selected data items for transmission to the mobile data communication device 24, and preferably uses industry standard mail protocols, such as SMTP, POP, IMAP, MIME and RFC-822, to name but a few. The E-Mail sub-system 44 can receive messages A from external computers on the LAN 14, or can receive messages C from some external network such as the Internet 18 or a wireless data communication network 22, and stores these messages in the primary data store 40. Assuming that the redirector 12 has been triggered to redirect messages of this type, the redirector detects the presence of any new messages and instructs the E-Mail system 44 to repackage the message by placing an outer wrapper B about the original message A (or C), and by providing the addressing information of the mobile data communication device 24 on the outer wrapper B. As noted above, this outer wrapper B is removed by the mobile device 24, and the original message A (or C) is then recovered, thus making the mobile device 24 appear to be the desktop system 10A.

In addition, the E-Mail sub-system 44 receives messages back from the mobile device 24 having an outer wrapper with the addressing information of the desktop system 10A, and strips this information away so that the message can be routed to the proper sender of the original message A (or C). The E-Mail sub-system also receives command messages C from the mobile device 24 that are directed to the desktop system 10A to trigger redirection or to carry out some

other function. The functionality of the E-Mail sub-system 44 is controlled by the redirector program 12.

The TCP/IP sub-system 42 is an alternative repackaging system. It includes all of the functionality of the E-Mail sub-system 44, but instead of repackaging the user-selected data items as standard E-mail messages, this system 5 repackages the data items using special-purpose TCP/IP packaging techniques. This type of special-purpose sub-system is useful in situations where security and improved speed are important to the user. The provision of a special-purpose wrapper that can only be removed by special software on the mobile device 24 10 provides added security, and by bypassing E-mail store and forward systems, the speed of delivery of messages can be improved.

As described previously, the present invention can be triggered to begin redirection upon detecting numerous external, internal and networked events, or trigger points. Examples of external events include: receiving a command message 15 from the user's mobile data communication device 24 to begin redirection; receiving a similar message from some external computer; sensing that the user is no longer in the vicinity of the host system; or any other event that is external to the host system. Internal events could be a calendar alarm, screen saver activation, keyboard timeout, programmable timer, or any other user-defined event that is 20 internal to the host system. Networked events are user-defined messages that are transmitted to the host system from another computer that is connected to the host system via a network to initiate redirection. Sensing that the user is not in the vicinity of the host system may be achieved by (1) an electronic camera subsystem

that detects whether the user has left a predetermined area; (2) heat sensors that detects the lack of the user's heat presence; (3) motion detector that monitors if the user has not created any motion for a predetermined period of time; (4) disconnection or detachment of the mobile device from a serial cradle connected to the desktop computer or host system (prior to the mobile device user departing, user would remove the device from a serial cradle that permits a serial synchronization of the data on the mobile with that in the host system); and, (5) short-range RF detachment to the mobile device worn by the user as he departs the vicinity of the host system.

The screen saver and keyboard sub-systems 46, 48 are examples of systems that are capable of generating internal events. Functionally, the redirector program 12 provides the user with the ability to configure the screen saver and keyboard systems so that under certain conditions an event trigger will be generated that can be detected by the redirector 12 to start the redirection process. For example, the screen saver system can be configured so that when the screen saver is activated after, for example, 10 minutes of inactivity on the desktop system, an event trigger is transmitted to the redirector 12, which starts redirecting the previously selected user data items. In a similar manner, the keyboard sub-system can be configured to generate event triggers when no key has been depressed for a particular period of time, thus indicating that redirection should commence. These are just two examples of the numerous application programs and hardware systems internal to the host system 10A that can be used to generate internal event triggers.

FIGs. 4 and 5, set forth, respectively, flow charts showing the steps carried out by the redirector software 12 operating at the desktop host system 10A, and the steps carried out by the mobile data communication device 24 in order to interface with the host system. Turning first to FIG. 4, at step 50, the redirector program 12 is started and initially configured. The initial configuration of the redirector 12 includes: (1) defining the event triggers that the user has determined will trigger redirection; (2) selecting the user data items for redirection; (3) selecting the repackaging sub-system, either standard E-Mail, or special-purpose technique; (4) selecting the type of data communication device, indicating whether and what type of attachments the device is capable of receiving and processing, and inputting the address of the mobile device 24; and (5) configuring the preferred list of user selected senders whose messages are to be redirected.

FIG. 4 sets forth the basic steps of the redirector program 12 assuming it is operating at a desktop host system 10A, such as shown in FIG. 1. If the redirector 12 is operating at a network server host system 10B, as shown in FIG. 2, then additional configuration steps may be necessary to enable redirection for a particular desktop system 26, 28 connected to the server 10B, including: (1) setting up a profile for the desktop system 26, 28 indicating its address, events that will trigger redirection, and the data items that are to be redirected upon detecting an event; (2) maintaining a storage area at the server 10B for the data items; and (3) storing the type of data communication device 24 to which the desktop system's data items are to be redirected, whether and what type of attachments the

device 24 is capable of receiving and processing, and the address of the mobile device 24.

Once the redirector program is configured 50, the trigger points (or event triggers) are enabled at step 52. The program 12 then waits 56 for messages and signals 54 to begin the redirection process. A message could be an E-Mail message or some other user data item that may have been selected for redirection, and a signal could be a trigger signal, or could be some other type of signal that has not been configured as an event trigger. When a message or signal is detected, the program determines 58 whether it is one of the trigger events that has been configured by the user to signal redirection. If so, then at step 60 a trigger flag is set, indicating that subsequently received user data items (in the form of messages) that have been selected for redirection should be pushed to the user's mobile data communication device 24.

If the message or signal 54 is not a trigger event, the program then determines at steps 62, 68 and 66 whether the message is, respectively, a system alarm 62, an E-Mail message 64, or some other type of information that has been selected for redirection. If the message or signal is none of these three items, then control returns to step 56, where the redirector waits for additional messages 54 to act upon. If, however the message is one of these three types of information, then the program 12 determines, at step 68, whether the trigger flag has been set, indicating that the user wants these items redirected to the mobile device 24. If the trigger flag is set, then at step 70, the redirector 12 causes the repackaging system (E-Mail or TCP/IP) to add the outer envelope to the user data item, and at step 72

the repackaged data item is then redirected to the user's mobile data communication device 24 via LAN 14, WAN 18, wireless gateway 20 and wireless network 22. Control then returns to step 56 where the program waits for additional messages and signals to act upon.

5           Although not shown explicitly in FIG. 4, after step 68 the program could, if operating in the preferred list mode, determine whether the sender of a particular data item is on the preferred list, and if not, then the program would skip over steps 70 and 72 and proceed directly back to step 56. If the sender is on the preferred list, then control returns to steps 70 and 72 for repackaging and  
10           transmission of the message from the preferred list sender to the mobile device 24.

          FIG. 5 sets forth the method steps carried out by the user's mobile data communication device 24 in order to interface to the redirector program 12 of the present invention. At step 80, the mobile software is started and the mobile device 24 is configured to operate with the system of the present invention, including, for  
15           example, storing the address of the user's desktop system 10A.

          At step 82, the mobile device waits for messages and signals 84 to be generated or received. Assuming that the redirector software 12 operating at the user's desktop system 10A is configured to redirect upon receiving a message from the user's mobile device 24, then at step 86 the user can decide to generate a  
20           command message that will start redirection at the host system 10A. If the user does so, then at step 88 the redirection message is composed and sent to the desktop system 10A via the wireless network 22, through the wireless gateway 20,



via the Internet 18 to the LAN 14, and is finally routed to the desktop machine 10A.

In this situation where the mobile device 24 is sending a message directly to the desktop system 10A, no outer wrapper is added to the message (such as message C in FIGs. 1 and 2). In addition to the redirection signal, the mobile device 24 could transmit any number of other commands to control the operation of the host system 10A, and in particular the redirector program 12. For example, the mobile 24 could transmit a command to put the host system 10A into the preferred list mode state, and then could transmit additional commands to add or subtract certain senders or certain message characteristics from the preferred list. In this manner, the mobile device 24 can dynamically limit the amount of information being redirected to it by altering the preferred list.

Other example commands include: (1) a message to change the configuration of the host system 10A to enable the mobile device 24 to receive and process certain attachments; and (2) a message to instruct the host system 10A to redirect an entire data item to the mobile device 24 in the situation where only a portion of a particular data item has been previously redirected.

Turning back to FIG. 5, if the user signal or message is not a direct message to the desktop system 10A to begin redirection (or some other command), then control is passed to step 90, which determines if a message has been received. If a message is received by the mobile, and it is a message from the user's desktop 10A, as determined at step 92, then at step 94 a desktop redirection flag is set "on" for this message, and control passes to step 96 where the outer

envelope is removed. Following step 96, or in the situation where the message is not from the user's desktop 10A, as determined at step 92, control passes to step 98, which displays the message for the user on the mobile device's display. The mobile unit 24 then returns to step 82 and waits for additional messages or signals.

5           If the mobile device 24 determines that a message has not been received at step 90, then control passes to step 100, where the mobile 24 determines whether there is a message to send. If not, then the mobile unit returns to step 82 and waits for additional messages or signals. If there is at least one message to send, then at step 102 the mobile 24 determines whether it is a reply message to a message that  
10           was received by the mobile unit. If the message to send is a reply message, then at step 108, the mobile 24 determines whether the desktop redirection flag is on for this message. If the redirection flag is not on, then at step 106 the reply message is simply transmitted from the mobile device 24 to the destination address via the wireless network 22. If, however, the redirection flag is on, then at step 110 the  
15           reply message is repackaged with the outer envelope having the addressing information of the user's desktop system 10A, and the repackaged message is then transmitted to the desktop system 10A at step 106. As described above, the redirector program 12 executing at the desktop system then strips the outer envelope and routes the reply message to the appropriate destination address using  
20           the address of the desktop system 10A as the "from" field, so that to the recipient of the redirected message, it appears as though it originated from the user's desktop system rather than the mobile data communication device.

If, at step 102, the mobile 24 determines that the message is not a reply message, but an original message, then control passes to step 104, where the mobile 24 determines if the user is using the redirector software 12 at the desktop system 10A, by checking the mobile unit's configuration. If the user is not using the redirector software 12, then the message is simply transmitted to the destination address at step 106. If, however, the mobile determines that the user is using the redirector software 12 at the desktop system 10A, then control passes to step 110, where the outer envelope is added to the message. The repackaged original message is then transmitted to the desktop system 10A at step 106, which, as described previously, strips the outer envelope and routes the message to the correct destination. Following transmission of the message at step 106, control of the mobile 24 returns to step 82 and waits for additional messages or signals.

Now with reference to FIGs. 6-8, there will be described an alternative two-host Internet-based system using many of the features of the system described in the network-based host system 10B configuration shown in FIG. 2. In the system shown in FIGs. 6-8, however, instead of a single host system 10B for storing the user's messages and for operating the redirector program 12, there are two hosts, a messaging host 230, where the user's data items are stored, and a wireless redirector host system 240, where a wireless redirector program 242 operates. These two host system are preferably coupled together via the Internet 218. The wireless redirector program 242 is similar in many respects to the redirector program 12 described above, but is configured for communicating with a wireless gateway 260 coupled to a wireless data network 222.

With reference to FIG. 6, there is shown an example system diagram showing the redirection of user data items, such as message A, from user A's desktop PC 204 to user B's mobile data communication device 220, or alternatively, message B from user B's mobile communication device 220 to user A. In this example, the messaging host system 230 maintains and stores data items received from the Internet 218 for user B in a message inbox. In this particular system example, the messaging host system 230 is preferably an Internet Service Provider ("ISP") that provides connectivity to the Internet 218 for a plurality of users, including user B. In another embodiment of the present invention, the messaging host 230 may be a web-based E-mail hosting service such as MSN Hotmail™ or a variety of other known web-based E-mail hosting systems. In another embodiment of the invention, the E-mail hosting service supplies a strictly wireless solution.

In this embodiment of the invention, the messaging host system 230 is configured so as to forward a copy of all incoming data items destined for user B's inbox to a second host referred to herein as a wireless redirector host system 240. The wireless redirector host system 240 includes the wireless redirector program 242. Advantageously, data items destined for a user of the messaging host system 230 having a mobile communication device are continuously "pushed" to the wireless redirector host system 240 as they arrive at the messaging host system 230. Upon arrival at the redirector host system 240, a wireless redirector software program 242 operating at the system 240 determines whether such data items are user-selected data items to be pushed via a wireless network 222 to the user's

mobile communications device 220. In this manner, user-selected data items are advantageously pushed out to the mobile communication device 220 contemporaneously as they arrive to the messaging host system 230 so that the user need not be concerned about delays in receiving user-selected data items on the user's mobile communication device 220.

The wireless redirector host system 240 acts primarily as a gateway for data items received from the Internet 218 and those specific data items that have been user pre-selected to be redirected (via filtering rules to be described later) to the user's mobile communications device via the wireless network 222. These filtering rules are similar to the "preferred list mode" operation described above with respect to the systems shown in FIGs. 1 and 2.

Message A in FIG. 6 represents a data item, such as an E-mail message, sent from user A's desktop PC 204 having user B as the recipient. Because user B has a mailbox on the messaging host system 230, the message A will be directed via the Internet to the host system 230. The flow of this message A is shown in a single solid line 206.

Message B in FIG. 6 represents an external message created on and sent from user B's mobile data communications device 220 having user A as a recipient. Alternatively, message B also may represent a command message from user B's mobile data communication device 220 to the wireless redirector host system 240. The flow of this message B is shown in a single dashed line 258.

As described in more detail in FIG. 7, the wireless redirector host system 240 preferably includes, along with the typical hardware and software associated

with an Internet gateway, the wireless redirector software 242 which includes a mail handler, preferably a sendmail daemon (not shown), a local delivery agent (not shown), a plurality of wireless mail stores 248 (preferably one for each mobile user such as user B), a filter database 250, and a mobile user profile database 254.

5           Also as described in more detail in FIG. 7, the messaging host system 230 is preferably a Unix system that includes a sendmail daemon 232, a ".forward" file 238, and a memory storage area 236 for storing the data items of certain user's that are having messages redirected to their mobile data communication devices 220.

10           Referring now to FIGs. 6 and 7, the two-host system invention will first be described by way of example with reference to message A. FIG. 6 shows an E-mail message A being communicated over the Internet 218 from user A's desktop PC 204 destined for user B's inbox, which is located on the messaging host system 230. Once the message A reaches a mail handler 252 at the messaging host 230,  
15           such as a sendmail daemon 232 in the preferred embodiment, it can be detected and acted upon by this system 230.

          One of the objectives of the present invention is to be as non-obtrusive as possible to the messaging host system 230 so as to make the invention simple to install and implement for ISPs. The messaging host system 230 may be configured  
20           in many ways to detect such messages. Since not all users of the ISP will have a mobile communication device 220, it is preferable that the system 230 includes a unique user file that is accessed and modified upon the arrival of any new message. The preferred method of detecting new messages, such as message A, is using

Unix's ".forward" file 238. Preferably, the redirection (or forwarding) of data items is accomplished by modifying the ".forward" file 238 typically found in the user's root directory at the messaging host system 230, such as an ISP. The ".forward" file is a simple ASCII text file comprising at least a list of one or more E-mail addresses (with some control information). The sendmail daemon 232 checks for the existence of this file 238, and uses its content to forward data items to the appropriate locations. Other methods of detecting and forwarding new data items destined for a user having a mobile communications device 220 could also be used and such other methods are well within the scope of the present invention.

An example of the content of the ".forward" file modified for the present invention is:

```
\bgilhuly@isp.net bgilhuly@wirelessredirectorhost.net
```

In this example, the sendmail daemon 232 would redirect a copy of any incoming data items to those two addresses, namely "ogilhuly@isp.net" and "bgilhuly@wirelessredirectorhost.net." In the latter case, the data item would, preferably, be sent via the Internet to the wireless redirector host system 240 for further handling by the wireless redirector software program 242. The former address requires the sendmail daemon 232 to send the data item to user B's inbox of the local data item store 236. User B may access his data items in the inbox as he traditionally does – by, for example, POP3 or IMAP. In this manner, the forwarding activity is transparent to the user. The user B when viewing the inbox data items at his desktop PC 202 would know of the redirecting activity only by

the message text that may be added to the messages as they are redirected by the mail handler.

Assuming that the redirector program 242 is activated at the wireless redirector host system 240, and has been configured by the user to replicate certain user data items (such as message A) to the mobile communications device 220, when the message A is received at the wireless redirector host system 240, the redirector program 242 detects message A's presence and prepares the message for a second redirection to the mobile device 220. In preparing the message for the second redirection, the redirector program 242 may compress the original message A, it may compress the message header, or it may encrypt the entire message A to create a secure link to the mobile device 220. However, before the redirector program 242 compresses or encrypts the message A and redirects it to the mobile device 220, it examines stored user information and filtering rules that are associated with the recipient, user B, so as to determine how the message A should be handled.

A) Filtering

Preferably, before the redirector program 242 begins preparing the message A for redirection, the redirector 242 examines the data item with respect to rules contained on a user B configurable filtering agent 250 (see, FIG. 7) which essentially is a database of rules that are to be applied for each user's incoming data items. The filtering agent 250 is preferably accessible by the user via the World Wide Web in a filter web page 252. The filter web page 252 allows the user, if the user so desires, to access and apply a plurality of filtering rules or any



combination thereof that are to be applied to all incoming data items destined for that user. Preferably, in addition to filtering rules, web page 252 allows user B to switch between an active or a de-active state for the redirection of user B's incoming messages. This switching feature is particularly useful during instances where user B is at his desktop PC 202 and accessing his inbox of the local store 236 and desires that the redirection of incoming mail to his mobile device 220 is temporarily deactivated. The following criteria are exemplary of the types of filtering rules that may be available to the user: sender(s); how addressed (To, CC, BCC); subject keyword(s); message keyword(s); and importance (high, low, normal).

In any event, the filtering agent 250 is preferably hosted by the wireless redirector host system 240, but may be hosted by alternative host systems, including the messaging host system 230 so long as the redirector program 242 has access to the most current set of rules and can make a determination whether any particular data item has satisfied all user-defined filtering rules. Alternatively implemented, the filtering agent 250 may be combined with the user profile database 254. Data items that do not clear the filtering rules are marked as "handled" by the redirector program 242 in the wireless data item store 248, and are not further handled by the redirector 242.

20           B)     User Profile

Also accessible by the redirector program 242 is the address of the user's mobile data communication device 220, the user's SMTP address, the type of device 220, and whether the device 220 can accept certain types of attachments,

such as word processing or voice attachments. This information is preferably maintained in a user profile database 254 (see, FIG. 7). Such user information may be preferably created, updated and removed via a web-based user administration page 256. Web page 256 is preferably access-restricted to the system administrator of the messaging host system 230 who may from time to time add new users to the redirection service. In addition to the above user information, the system administrator preferably has a switch control feature on the web page 256 to deactivate or activate redirection of the data items from the host system 230 that takes precedence over the user's selection on web page 252. This, advantageously, allows the system administrator to maintain control over the value-added service described herein.

If the user's type of mobile device 220 cannot accept certain types of attachments, then the redirector program 242 can be programmed to route the attachments to a fax or voice number where the user is located. The user may provide such information details to the redirector program 242 via a return message.

C) Redirection

After the redirector program 242 has determined that a particular message should be redirected, and it has prepared the message for redirection, the software 242 preferably converts the message from MIME to CMIME (MIME is a standard Internet mail format, and CMIME is a compressed version of MIME), and then sends the message A to a memory store located in the mobile communications device 220 via the wireless gateway 250 and the wireless data network 222. In

doing so, the redirector program 242 preferably packages message A as a message with an outer envelope A' that contains the addressing information of the mobile device 220. In the preferred embodiment, the outer envelope is GME. The wireless gateway 260 requires this outer envelope information A' in order to know where to send the redirected message A. Once the repackaged message (message A in A') is received by the mobile device 220, the outer envelope A' is removed, and the original message A is placed in the second memory store within the mobile device 220. By removing the outer envelope A' and presenting to the user of mobile device 220 message A, the present invention causes the mobile device 220 to appear to be at the same physical location as the messaging host system 230, or PC 202 in a transparent, seamlessly integrated Internet account hosted by messaging host system 230.

15           D)    Outgoing Data Item From Mobile

If the redirected user data item is an E-mail message, as described above, then the user at the mobile device 220 sees the original subject line, sender's address, destination address, and carbon copy address. Preferably and desirably, the redirection of the E-mail message A is transparent to the mobile communication device user. When the user, at the mobile device 220, replies to message A, or when the user authors a new message (a reply or a new message collectively referred to as "message B"), the software operating at the mobile device 220 adds a similar outer envelope (message B') to the reply message B (or

the new message B) to cause message B to be routed to the wireless redirector host system 240 via the wireless network 222, which then removes the outer envelope B', repackages message B as message B'', and redirects message B'' to the final destination, such as user A's PC desktop 204.

5           The general flow of such transmission is shown as a dotted line in FIG. 6. In this embodiment of the invention, the removal of the outer envelope B' and repackaging of message B into envelope B'' results in the outgoing redirected message B'' from the wireless redirector host system 240 being sent using the E-mail address of the user's mailbox on messaging host system 230, rather than the  
10           address of the mobile device 220, so that it appears to the recipient of the message B'' that the message originated from the user's desktop system 202 or from the messaging host system 230 itself (as would be the case of a web-based E-mail hosting system) rather than the mobile data communication device 220. This is accomplished by the redirector modifying the "from" and "reply to" identifiers  
15           associated with the message B to now have the SMTP address of user B's messaging host system 230 E-mail account. Advantageously, any replies to the message B'' will then be sent to user B's inbox on messaging host system 230, which, if it is still in redirector mode, will repackage the reply and resend it to user B's mobile data device 220, as described above.

20           In this embodiment, a copy of message B (labelled B''') is redirected to user B's inbox at messaging host system 230 for retrieval and access by user B at some later time – for recording keeping purposes. In doing so, the redirector program 242 preferably repackages message B as message B''' so as to now have

modified addressing information. In this preferred instance, the modified addressing information would include changing the "from" header information to read something to the following effect: "Sent from mobile communications device to recipient" where 'recipient' would be the recipient's address of message B". This message B'" is forwarded, preferably via the Internet 218, to the messaging host system 230.

As shown in FIG. 7, the messaging host system is preferably configured as an ISP. Here, the ISP system 230 includes a sendmail daemon 232, which forwards the copy B'" to the local data item store 236 by a local delivery agent (not shown). Further, user B may preferably configure his local inbox of data items at the desktop 202 to store such copy messages in a specific inbox for mobile data communications device data items. Of course in the illustrative example of messaging host system 230 configured to redirect all incoming data items to wireless redirector host system 240, sendmail 232 would detect a new message and the ".forward" file 238 would again be accessed and the forwarding information therein acted upon. Consequently, message B'" is redirected (not shown) to redirector host system 240. At the redirector host system 40, the redirector is preferably programmed to detect that such a message B'" is a redirection of message B'" sent therefrom. As such, the redirector ignores this re-directed message. Alternatively, the mail handler 232 at the messaging host system 230 is configured to detect such messages and to not redirect such messages.

It is to be understood that a plurality of messaging host systems 230 may use a single redirector host system 240 for redirection of users' E-mail messages. Further still, a single redirector program 242 may be used to service the plurality of messaging host systems 230.

5 Finally, turning to FIG. 8, a flow chart is set forth showing the steps carried out by the redirector program 242 operating at the redirector host system 240 shown in FIGs. 6 and 7. The basic steps carried out by the mobile communications device 220 in order to interface with the redirector host system 240 may be accomplished by substantially the same steps as shown in FIG. 5, although  
10 modified for this two-host aspect of the invention.

The flow chart in FIG. 8 assumes that the redirector program 242 has been activated and is operating. Additional configuration steps will be necessary to enable redirection services for a new messaging host system 230. These additional configuration steps include: (1) setting up a profile for the new  
15 messaging host system 230 indicating its address, etc. (2) setting up individual user profiles, (3) initiating default filtering rules for incoming messages from the messaging host system for the users, and (4) making available both the filtering rule 252 and user profile 256 web pages. The flow chart also assumes the necessary steps have been undertaken to configure the messaging host system 230  
20 to forward a copy of all incoming messages to the redirector host system 240 (*i.e.*, the Unix ".forward" file has been properly configured.)

Once the messaging host system 230 is configured 268 and the redirector program 242 is configured 270, the program 242 then waits for data items at step

272. As discussed earlier, data items need not be limited to E-mail messages but may also include signals that are representative of user profile changes or filtering rule changes.

When a data item is detected, the program determines at steps 274, 276  
5 and 278 whether the data item is, respectively, a user profile change 274, a  
message from the Internet 276, or a message from the wireless mobile device 278.  
If the data item is a user profile change, then the appropriate user profile change is  
made at 280. Control then returns to step 272 where the program waits for  
additional data items. If the data item is a message from the Internet, then the  
10 appropriate user profile information is checked and applied at step 290. The  
program then checks if the filter rules have changed at step 292. If so, the filter  
rules are reloaded. Next, the filter rules are applied at step 296. If the message  
does not clear all applicable redirection filter rules at step 297, the preparation and  
redirection steps 298 and 300, respectively, are skipped. The message is thus  
15 ignored and control is returned to the redirector program 242 at step 272.  
Assuming, however, that the message (or at least a portion thereof) is to be  
redirected, then the message is prepared for redirection at step 298. In the  
preparation step 298, the redirector program 242 adds the outer envelope to the  
message for wireless transmission. At step 300, the repackaged message is then  
20 forwarded to the user's mobile device 220 via LAN 258, wireless gateway 260 and  
wireless network 222. Control then returns to step 272 where the program waits  
for additional data items to act upon.

If, at step 278, there is a determination that the data item is a message from the mobile device 220, then the message is prepared for Internet redirection at step 284. Preparation would preferably include changing the "from" and "reply to" fields of the message to replicate the address of the user's SMTP address at the messaging host system 230 – the resulting message referred to as message B'' in FIG. 6. Also, the preparation step may include making a second copy of the message, such message referred to as message B''' in FIG. 6. In this second copy, the "from" field is changed to, preferably, "Sent from the mobile device to Recipient" where 'Recipient' is the SMTP address of the recipient of message B''. At step 286, previous messages or attachments are appended. At step 288, one message is forwarded to the recipient (message B'') and the copy of the message (message B''') is forwarded to the user's messaging host system 230 destined for the user's local data item store 236 for record keeping purposes. Control then returns to step 272, where the program waits for additional data items to act upon. If, at step 278, there is a determination that the data item is not a message from the wireless device, other functions may be performed by the redirector program 242 if so programmed to do so. For instance, the message could be a command message such as described earlier in this application where additional text of the E-mail message may be transmitted to the mobile device 220.

Although not explicitly shown in the flowchart, if at step 276 there is a determination that the message is from the Internet, then the redirector program 242 would check whether the message is a re-redirection message from the messaging host system 230. If so, all-subsequent steps are skipped (the message is



ignored) and control is returned to step 272. In this manner, re-directed messages are not redirected to the mobile device 220. Alternatively implemented, this determination could be undertaken at step 296 as part of the default filtering rules. It is to be understood that the user profile and filtering rules could alternatively be combined together, thus eliminating a step(s). This is, of course, well within the scope of the present invention.

Although not shown, the additional step of maintaining the wireless data item store 248 is another step(s) that the redirector would preferably manage. At a predetermined storage threshold either by date or size, each user's earliest stored data item would be deleted to make room for newer incoming data items.

Referring now to FIG. 9-12, there will be described an alternative multi-host Internet-based system using many of the features of the system described in the two-host Internet-based system configuration shown in FIG. 6-8. In the redirector system 200 shown in FIGs. 9-12, instead of a two-host system for storing the mobile device user's messages and for operating the redirector program 12, there is a multiplicity of hosts, with each one performing part of the distributed tasks of redirector program 12. The redirector system 200 is capable of handling a multiplicity of messaging hosts 230, where the mobile device user's data items are stored. Each messaging host 230 corresponds to an ISP with its own set of users, a subset of which are configured to have their email forwarded for wireless redirection to their respective mobile devices 220 via the mail handler 232 according to the forward file 238, as described above with reference to FIGs. 6-8. However, in the multi-host Internet-based system 200, instead of using a single

wireless redirector host system 240, and a single wireless redirector program 242, the redirector program has been embodied into a multiplicity of redirector send agents 245 and a redirector receive agents 249, each pair of which can be hosted on separate redirector agent host servers 243. This multi-host configuration provides the significant advantage of allowing the redirector system 200 to be scaleable and easily configured to support multiple ISPs each having multiple sites, with each site having an associated Internet domain name. A single redirector agent host server can support several send and receive pairs of redirector agents, and each pair of agents serving multiple ISP sites. The mapping of redirector host servers to ISP sites and the configuration of redirector agents is accomplished via the web-based administration 257 of the administration information database 259.

SMTP is the only system interface the ISP needs to support in order to interface with redirector system 200 during normal operation. Advantageously, a web browser is the only user interface 253 an ISP needs to support in order to configure the redirector system 200. Similarly, a web browser is the user interface 256 a user needs to support in order to configure the redirector system 200.

By using a hierarchy of stored configuration information in the databases 259, 255, 254 and 250, the web interfaces 257, 256, 253 and 252 allow a plurality of system 200 administrative accounts to manage a plurality of site manager accounts, which in turn manage a plurality of site dependent mobile device user accounts. At each level down, the web-based interfaces provide access to only those elements of the databases for which the account has authority.

Administrative accounts have authority to manage site manager accounts, redirector agent host server configuration records, and set site configuration default values. Site manager accounts have authority to override certain site configuration records, manage user accounts, and set user configuration default values. User accounts have authority to override certain user records. The next three paragraphs illustrate the type of information and authority associated with the three accounts described above.

The access to administrative operations is limited to system 200 operators who have an administrative account comprising an administrator name and password useable on web-based administration page 257 in order to gain access to the administration database 259. An administrator of system 200 manages records for configuring redirector agent host servers, and manages accounts for site managers, which access the site information database 255 via web-based site information page 253.

Site managers represent ISP hosted Internet domains and manage site information records for further configuring redirector agents, and manage accounts for mobile device 220 users who wish to use system 200 for redirecting their data items. The site information record includes such items as, for example, an optional Internet domain name and a default tag line to be appended at the end of every email.

A site mobile user, when provided with an account by a site manager, can access the user information database 254 via web based user administration page 256, in order to update those fields of their user information record for which they

have authority. For instance, a user might wish to override the default site wide tag line stored in the site info record corresponding to his site, thereby enabling the the tag-line customization feature. The user might also wish to override the default domain name based email address provided by his site manager by specifying his single SMTP address, thereby enabling domain-messaging feature.

As used in this description and in the appended claims, the phrase domain-messaging is defined as the feature which allows an ISP or a site manager to customize the "sent from" and "reply to" addresses for messages generated at a mobile device by a mobile device user. This new feature functionality allows an ISP to effectively offer "single email address" functionality to their mobile device users that have an email address, which is different from the ISP's default domain address. For example, a first mobile device user with "single email address" user@userscompany.com, can go through ISP's forwarding service over domain isp.com where the user has traditionally the email address user@isp.com. In one embodiment of the present invention, the ISP can activate the domain-messaging feature of the redirector receive agent to replace user@isp.com with user@usercompany.com in the "sent from" and "reply to" fields for email messages generated (i.e., originally created, or replied from) at the mobile device user's mobile device, thereby (1) allowing the user to advantageously use only one email address when creating messages at either his mobile device or at his traditional non-wireless email generation means and (2) making it appear as though the user has a "single email address", user@user company.com.

Closely related to the domain-messaging feature is the tag line customization feature, which as used in this description and in the appended claims, is defined as the feature, which allows an ISP to provide a default tag line to be appended to all of its mobile device users' messages generated at and sent from the mobile device, as well as the user's ability to customize the tag line. Preferably, the tag line is appended to the messages after arrival from the wireless network such as at the redirector system, but prior to transmission to the intended recipient. This advantageously permits over-the-air bandwidth transmission savings. For instance, an ISP may wish to have a default tag line which reads, for instance, "This mobile message brought to you by <http://www.isp.com/>" thereby creating a sales opportunity at every email message sent by every one of their new mobile users. A mobile user can then customize the tag line by, for instance, including a signature such as:

With regards,

User Name  
tel.: xxx.yyy.zzz xwww  
e-mail: [user@isp.com](mailto:user@isp.com)

FIG. 11 illustrates the steps taken by a redirector receive agent 249 in order to accomplish the two features described in the previous paragraphs, namely domain-messaging and tag-line customization. In this example, the redirector receive agent can be considered to accomplish steps 284, 286, and 288 of the redirector program 242 illustrated in FIG. 8, as well as the additional domain-messaging and tag line customization features to be described. At step 300, the

redirection receive agent is notified that a wireless message is available for redirection in wireless data item store 248. This step consists of getting the message data 310 comprised of a content type, a stream, and a user id. This example assumes that the message type is an email message originated from the user's mobile device 220. At the next step 320, the user id 312 obtained in step 300 is used as a key to obtain a user record 330 from the user information database 254. At step 340, site id 332 obtained in step 320 is used as a key to obtain site information record 350 from the site information database 255. Step 400, comprised of steps 410, 420, 430 and 440, sets the user's email address upon the condition of the site information record 350 having a blank domain name. If the domain name is blank, the SMTP address found in the user record 330 is used as the email address. If a domain name is found in site record 350, a juxtaposition of user name and domain name is utilized as the email address. Step 440 replaces the "send from/ reply to" addresses of the message to the email address. Collectively, step 400 accomplishes the domain-messaging feature. Steps 500, comprised of steps 510, 520, 530 and 540 collectively accomplish the tag-line customization. In step 510, the user tag line found in user record 330 is examined. If the user tag line is blank, the site tag line found in record 350 is utilized. If the user tag line is not blank, it is utilized instead of the site tag line. The utilized tag line is appended to the message at step 540. Finally, step 288 proceeds to send the message to the recipient designated in the message via the Internet, as described in reference to FIG. 8.

Although not explicitly shown in the drawings, it is considered a variation of the present invention that is within the scope of the invention to perform other types of automated information substitution in message data items of which two examples have been illustrated in the case of domain-messaging and tag line customization in the redirector receive agent.

As illustrated in Fig. 12, the system 200 advantageously permits at least one ISP, such as ISP A 600, to provide wireless redirection for its customer base and customized single email address transparency for a plurality of companies, such as Company A and Company B, by managing a distinct site for each company, in this case ISP A site 610, Company A site 612, and Company B site 614, with corresponding site manager accounts on the redirector system 200. Mobile device users associated to each of those sites can configure their email tag lines, and their email address obtained by juxtaposing their email name and their custom site's domain name, by taking advantage of domain-messaging and tag line customization respectively, via the web-based user interface 256.

Continuing with the same example, if ISP A having a corresponding messaging host 230 wishes to offer wireless redirection to its base users, the web-based site admin page 257 is used to create a site manager account for the ISP by the system 200 administrator in the administration information database 259 via the user interface 257. The 257 interface is also be used to create site manager accounts for other sites managed by the ISP, such as Company A or Company B. The web-based administration page 257 is also used to configure the name and authentication information of the redirector agent host server 243, and associated

redirector send and receive agents corresponding to each site. Then the ISP need only: a) provide configuration site information to the site info database 255 via the web based site information page 253, said site information corresponding to ISP site infrastructure such as the IP address of the mail handler 232, associated site domain name, and the creation of individual mobile device user accounts for its mobile device users; and b) add an entry for each of its mobile device users in the forward file 238. After the ISP mobile device user accounts 616, 616', 616'' are created for each site, the ISP mobile device users can update their respective user information 254 using the web-based user admin page 256.

To further illustrate this aspect of the present invention, an example is provided. ISP A provides wireless redirection service of messages traditionally only hosted at and accessed via the ISP to mobile devices assigned to its traditional ISP customer base. Some of the ISP customers base comprise of customers with customized domain names (i.e., domain.com) wherein the ISP hosts a web site (i.e., www.domain.com) and a plurality of email addresses associated with the customized domain names (i.e., john@domain.com). Such customers who opt for the wireless redirection of their email messages advantageously by virtue of the present invention may continue to use their customized email addresses when generating and receiving email messages at their mobile device. In this aspect of the invention, when the systems 200 and 230 are configured for wireless redirection of email directed to domain.com, a method for redirecting messages between a ISP host system and a mobile data communication device is provided, the method comprising the steps of: configuring redirection settings for one or



more mobile device users at the host system; receiving incoming messages directed to a first address at the ISP host system from a plurality of message senders; in response to the redirection setting, continuously redirecting the incoming messages from the ISP host system to the mobile data communication device via a redirector host system; receiving outgoing messages generated at the mobile communications device at the redirector host system; configuring address information of the outgoing messages so that the first address is used as an originating address of the outgoing messages; and transmitting the configured outgoing messages to message recipients.

10 Further still, the present invention provides a method of redirecting data items from a server system to a plurality of mobile data communication devices, comprising the steps of: providing at least one redirection program at the server system; providing a plurality of custom domain subsystems; providing a user profile for each of the plurality of custom domain subsystems at the server system, 15 wherein the user profiles each associate a particular domain name and user name with a particular mobile data communication device; receiving messages generated at the mobile data communications device at the server; configuring address information of the messages so that the messages appear to have been generated at a system hosting the domain name system; and transmitting the configured messages to 20 intended message recipients.

Yet another aspect of the present invention permits a computer system for redirecting messages from a mobile data communication device, comprising: a first host system operated at a second host system, the second host system operated by

an ISP and is capable of sending and receiving messages on behalf of the first host system; a redirector component that upon receiving a message generated at the mobile data communications device, by a message sender destined for a message recipient, configures address information of the received message such that the  
5 received message appears to have been generated at the first host system instead of at the mobile data communication device or the second host system. In such a system, the first host system has a first domain name associate therewith, and the second host system has a second domain name associated therewith.

Having described in detail the preferred embodiments of the present  
10 invention, including the preferred methods of operation, it is to be understood that this operation could be carried out with different elements and steps. This preferred embodiment is presented only by way of example and is not meant to limit the scope of the present invention which is defined by the following claims.

**What is claimed:**

1. A method of redirecting data items from a messaging host system to a user's mobile device, comprising the steps of:

5 detecting a new data item for the user at the messaging host system;  
forwarding a copy of the new data item to a redirector host system;  
determining whether the new data item should be redirected from the  
redirector host system to the user's mobile device; and  
if the new data item should be redirected, then packaging the new data item  
10 into an electronic envelope and transmitting the electronic envelope to the user's  
mobile device.

2. The method of claim 1, further comprising the steps of:

15 storing the new data item in a user's inbox coupled to the messaging host  
system.

3. The method of claim 1, wherein the detecting step includes the steps of:

determining whether a new data item has been received at the messaging  
host system for a particular user; and  
20 checking a forwarding file coupled to the messaging host system to  
determine whether the particular user's data items should be redirected to the  
redirector host system.

4. The method of claim 3, wherein the forwarding file includes a list of system addresses where the user's data items should be forwarded by the messaging host system.

5. The method of claim 1, further comprising the steps of:  
forwarding a copy of the new data item to the user's inbox on the messaging host system.

6. The method of claim 1, further comprising the steps of:  
configuring a set of filtering rules for use by the redirector host system in determining whether the new data item should be redirected to the user's mobile device; and  
providing an access mechanism that allows the user to remotely configure and reconfigure the filtering rules.

7. The method of claim 1, further comprising the steps of:  
configuring a user profile database for use by the redirector host system in determining whether the new data item should be redirected to the user's mobile data device; and  
providing an access mechanism that allows a system administrator of the messaging host system to remotely configure and reconfigure the user profile database.

8. The method of claim 1, further comprising the steps of:  
receiving the electronic envelope at the user's mobile device;  
extracting the new data item from the electronic envelope; and  
storing the new data item within the memory of the mobile device.

5

9. The method of claim 1, further comprising the steps of:  
preparing a reply data item at the mobile device that is related to the new  
data item;  
packaging the reply data item into an electronic envelope and transmitting  
10 the electronic envelope to the redirector host system.

10. The method of claim 9, wherein the electronic envelope is addressed using  
the electronic address of the redirector host system.

15 11. The method of claim 10, further comprising the steps of:  
extracting the reply data item from the electronic envelope at the redirector  
host system; reconfiguring the addressing information associated with the  
reply data item; and  
transmitting the reconfigured reply data item to the messaging host system.

20

12. The method of claim 11, further comprising the steps of:  
receiving the reconfigured reply data item at the messaging host system;  
and

storing the reply item in a user's inbox coupled to the messaging host system.

13. The method of claim 10, further comprising the steps of:

5 extracting the reply data item from the electronic envelope at the redirector host system;

reconfiguring the addressing information associated with the reply data item; and

10 transmitting the reconfigured reply data item to a destination system using an electronic address included in the reply data item.

14. The method of claim 1, further comprising the steps of:

providing the user's mobile device with an interface to a wireless data network;

15 forwarding the electronic envelope from the redirector host system to a wireless gateway system; and

transmitting the electronic envelope from the wireless gateway system to the user's mobile device using the wireless data network.

20 15. The method of claim 1, further comprising the step of:

transmitting a deactivation message from the user to the redirector host system; and

upon receiving the deactivation message, prohibiting the redirection of data items for the user sending the deactivation message.

16. The method of claim 1, wherein the determining step includes the steps of:  
5 accessing a user profile database including a list of authorized users; and  
checking whether the user associated with the new data item is an authorized user to determine whether the new data item should be redirected to the user's mobile device.

10 17. The method of claim 1, wherein the determining step includes the steps of:  
accessing a filter rules database including a list of filters to be applied to data items for a particular user; and  
15 applying the filters to the new data item to determine whether the new data item should be redirected to the user's mobile device.

18. The method of claim 1, wherein the packaging step includes the step of addressing the electronic envelope using the electronic address of the user's mobile device.

19. The method of claim 1, wherein the data items are E-mail messages, and  
20 the messaging host system is an E-mail host system.

20. The method of claim 1, wherein the user's mobile device is a laptop computer.

21. The method of claim 1, wherein the user's mobile device is a two-way paging computer.

5 22. The method of claim 21, wherein the two-way paging computer includes a wireless network interface for communicating with the redirector host system via a wireless data network.

10 23. The method of claim 22, wherein the redirector host system is coupled to the wireless data network via a wireless gateway system.

24. The method of claim 23, wherein the electronic envelope is addressed using the wireless data network address of the two-way paging computer.

15 25. The method of claim 1, wherein the messaging host system is an Internet Service Provider.

20 26. The method of claim 25, wherein the data items are E-mail messages, and the Internet Service Provider includes a mail server program.

27. The method of claim 26, wherein the Internet Service Provider further includes a forwarding database coupled to the mail server program for detecting whether a new data item received at the mail server should be forwarded to a



redirector host system, and for determining the electronic address of the redirector host system.

28. The method of claim 1, wherein the messaging host system and the redirector host system are coupled via the Internet.

29. The method of claim 6, wherein the access mechanism for remotely configuring and reconfiguring the filtering rules is a web-page interface.

30. The method of claim 7, wherein the access mechanism for remotely configuring and reconfiguring the user profile database is a web-page interface.

31. The method of claim 1, further comprising the steps of:  
configuring a user profile database for use by the redirector host system in  
determining whether the new data item should be redirected to the user's mobile  
data device; and  
storing, within the user profile database, the electronic address of the user's  
mobile device.

32. The method of claim 31, further comprising the steps of:  
storing, within the user profile database, information regarding the type and  
configuration of the user's mobile device.

33. The method of claim 31, wherein the packaging step further includes the steps of:

converting the new data item into a compressed format; and

5 placing the compressed new data item into an electronic envelope that is addressed using the electronic address of the user's mobile device.

34. A method of redirecting E-mail messages from a messaging host system to a user's wireless mobile device, comprising the steps of:

detecting an E-mail message for the user at the messaging host system;

10 forwarding a copy of the E-mail message from the messaging host system to a wireless redirector host system;

receiving the forwarded E-mail message at the wireless redirector host system and applying a set of user-defined filtering rules that determine whether or not to redirect the E-mail to the user's wireless mobile device via a wireless network coupled to the wireless redirector host system; and

15 if the filtering rules determine that the E-mail message is of the type that should be redirected, then redirecting the E-mail to the user's wireless mobile device by packaging the E-mail message in an electronic envelope that includes the wireless network address of the user's wireless mobile device.

20

35. The method of claim 34, further comprising the steps of:

providing a filter rules database for storing the user-defined filter rules; and

providing an interface mechanism to the filter rules database through which the user may define and re-define the filtering rules.

5 36. The method of claim 35, wherein the interface mechanism is a web page interface.

37. The method of claim 36, wherein the web page interface includes an activation/deactivation switch for turning on/off the operation of the wireless redirector host system for a particular user.

10

38. The method of claim 34, further comprising the step of:  
accessing a user profile database coupled to the wireless redirector host system to verify that the user associated with the E-mail message is an authorized user.

15

39. The method of claim 38, further comprising the step of:  
providing an access mechanism that allows a system administrator of the messaging host system to remotely configure and reconfigure the user profile database.

20

40. The method of claim 34, wherein the messaging host system is an Internet Service Provider (ISP).

41. The method of claim 40, wherein the ISP and the wireless redirector host system communicate via the Internet.

42. The method of claim 34, wherein the wireless redirector host system and the wireless mobile device communicate through a wireless gateway system and a wireless communication network.

43. A system for redirecting data items from a network to a user's wireless mobile device, comprising:

a messaging host system coupled to the network for receiving data items associated with a particular user and for forwarding the received data items to a predetermined address on the network; and

a redirector host system associated with the predetermined address for receiving the forwarded data items from the messaging host system and for redirecting those data items to the user's wireless mobile device.

44. The system of claim 43, wherein the network is the Internet.

45. The system of claim 43, wherein the messaging host system further includes:

a sendmail program for receiving and transmitting user data items; and

a forwarding file containing a list of authorized user's of the system, and the predetermined address to which the messaging host system will forward each user's data items.

5 46. The system of claim 45, wherein the messaging host system further includes a local data store for storing the data items of user's having accounts on the messaging host system.

10 47. The system of claim 43, wherein the redirector host system further includes:

a redirector software program for determining whether certain data items should be redirected to the user's wireless mobile device;

a filter rules database containing filtering rules to apply to the received data items for a particular user; and

15 a user profile database containing a list of authorized users.

48. The system of claim 47, wherein the redirector host system further includes a wireless data store for storing the forwarded data items.

20 49. The system of claim 43, wherein the data items are E-mail messages and the messaging host system is an E-mail server.

50. The system of claim 43, further comprising:

a wireless gateway system coupled to the redirector host system and a wireless data network for receiving the redirected data items and for transmitting those data items to the user's wireless mobile device via the wireless data network.

5 51. The system of claim 43, further comprising:

a filter rules database containing filtering rules to apply to the data items forwarded to the redirector host system, the filtering rules setting forth a list of data item characteristics that determine whether the redirector host system will redirect the data item.

10

52. The system of claim 51, further comprising:

an interface document coupled to the filter rules database for enabling the remote configuration of the filtering rules for a particular user.

15 53. The system of claim 52, wherein the interface document is a web page.

54. A method of operating a host system configured to redirect E-mail messages from the Internet to a user's wireless mobile device, comprising the steps of:

20 receiving an E-mail message from the Internet for a particular user;

accessing a user profile database to determine whether the particular user is an authorized user of the host system;

if the user is an authorized user, then accessing a filter rules database to apply a set of user-defined filtering rules to the E-mail message that dictate whether the E-mail message is the type of message that the user wants to have redirected to its wireless mobile device; and

5 if the E-mail message clears the filtering rules, then repackaging the E-mail message into an electronic envelope including the address of the user's wireless mobile device and forwarding the electronic envelope to a wireless gateway system for transmission onto a wireless data network associated with the user's wireless mobile device.

10

55. A method of redirecting data items between a server system and a plurality of mobile data communication devices, comprising the steps of:

providing at least one redirection program at the server system;

providing a plurality of custom domain subsystems;

15 providing a user profile for each of the plurality of custom domain subsystems at the server system, wherein the user profiles each associate a particular domain name and user name with a particular mobile data communication device;

20 receiving messages generated at the mobile data communications device at the server;

configuring address information of the messages so that the messages appear to have been generated at a system hosting the domain name system; and,

transmitting the configured messages to intended message recipients.

5 56. A computer system for redirecting messages from a mobile data communication device, comprising:

a first host system operated at a second host system, the second host system operated by an ISP and is capable of sending and receiving messages on behalf of the first host system;

10 a redirector component that upon receiving a message generated at the mobile data communications device, by a message sender destined for a message recipient, configures address information of the received message such that the received message appears to have been generated at the first host system instead of at the mobile data communication device or the second host  
15 system.

57. A system as claimed in claim 56, wherein the first host system has a first domain name associate therewith, and the second host system has a second domain name associated therewith.

20

58. A method for redirecting messages between a ISP host system and a plurality of mobile data communication devices is provided, the method comprising the steps of:



configuring redirection settings for one or more mobile devices at the  
host system;

receiving incoming messages directed to a first address at the ISP host  
system from a plurality of message senders;

5 in response to the redirection setting, continuously redirecting the incoming  
messages from the ISP host system to the mobile data communication device via a  
redirector host system;

receiving outgoing messages generated at the mobile communications  
device at the redirector host system;

10 configuring address information of the outgoing messages so that the first  
address is used as an originating address of the outgoing messages; and,

transmitting the configured outgoing messages to message recipients.

59. A method of redirecting electronic data items from a host system  
15 associated with a user to the user's mobile data communication device, comprising  
the steps of:

configuring an external redirection event at the host system, wherein the  
external redirection event is the host system sensing whether the user is in the  
physical vicinity of the host system;

20 receiving electronic data items at the host system; and

if the host system senses that the user is not in the physical vicinity of the  
host system, then continuously redirecting the received data items to the user's

mobile data communication device until the host system senses that the user is in the vicinity of the host system.

5 60. A method as claimed in claim 59, wherein the sensing is achieved by a heat sensor detecting a lack of heat presence emitted by the user.

61. A method as claimed in claim 59, wherein the sensing is achieved by a motion sensor detecting a lack of motion by the user.

10 62. A method as claimed in claim 59, wherein the sensing is achieved by removal of the mobile device from a mobile device cradle used by the user to locally synchronize information stored by at the mobile device and the host system.

15

## ABSTRACT OF THE DISCLOSURE

A system and method for pushing information from a host system to a mobile data communication device upon sensing a triggering event is disclosed. A redirector program operating at the host system enables a user to continuously  
5 redirect certain user-selected data items from the host system to the user's mobile data communication device upon detecting that one or more user-defined triggering events has occurred. The redirector program operates in connection with event-generating applications and repackaging systems at the host system to configure and detect a particular user-defined event, and then to repackage the  
10 user-selected data items in an electronic wrapper prior to pushing the data items to the mobile device.